

RST

CATALOGUE

2025



RST

SPONSORSHIP

Lukas Reiner

 @luxbiketv

Richard Fert

 @Richard Fert

Elvin Hepp

 @eh_enduro

Daniel Plenk

 @Daniel Plenk

Sven Hermann

 @svenherrmann_

Leopold Erhardt

 @leopold_erhardt

Joao Mendes

 Joao Mendes

Elof Lind

 @eloflindh

Dewayne Taylor

 @luxbiketv

Nic Hilton

 @nic_no_k

Josh Hult

 @joshhult

Sam Myers

 @sam_myers323

Gustaw Dadela

 @gustawdadela



Brayden Barret-Hay

 @braydenbarretthay

 Brayden Barrett/Hay

 Brayden Barrett/Hay



Jakub Vencel

 @jakubvencel

 Jakub Vencel

 Jakub Vencel



Fred Austruy

 @fredaustruy

 Fred Austruy MTB Fan Page

 Fred Austruy

Remy Carra

 @remycarra

 Remy Carra



Max Mey

 @maxmey

 Max Mey



Greg Watts

 @gregwatts1987

 Greg Watts



RST

TECHNOLOGY



*brand new HiFlo (TM) damper design
with IFP upgrade design.*

*Overall improved performance in hard
riding conditions.*

*Stable damping performance over a
longer time period.*





OCR Platform

Low Speed Compression control with high speed compression shim stack.



BO TNL

Blow-off damping system
Low Speed Compression with Lockout, blow off shim stack and rebound adjustment.



HCR

Hydraulic Compression with Rebound
Low Speed Compression Control with rebound adjustment



Tiny Remote Lockout

Smart Remote Lockout with complete new compact design . The shifter position can be adjusted vertically or horizontally with one bolt! No need to worry about any interference.



Remote Lock-out

This feature is available on any model featuring Compression/Lock-out adjustments. The remote has aluminium levers and a barrel adjuster on the cable to fine-tune your set up.



ABS

Compatible to the 2nd generation BOSCH ABS system.



Lock-out with Rebound

Hydraulic damping cartridge with lockout and rebound adjustment.



Lock-out with Fixed-rebound

Hydraulic damping cartridge with lockout and non-adjustable rebound



Lock-out

Hydraulic damping cartridge system with compression adjustment to lockout function.



Rebound Adjustment

A hydraulic adjustable cartridge that lets you externally set the forks rebound.



Mechanical Lock-out Cartridge

Mechanical lock-out system(not hydraulic)



Fixed Rebound

Hydraulic damping cartridge with non-adjustable Low speed rebound



Spring Pre-load

An adjustable top cap that lets a rider adjust the pre-load of the spring depending on rider weight and desired feel.



Post Lighting System

Front lamp holder integrated into the fork arch with two fixing bolts. Maintains the clean look of the fork arch with a plastic protection cover when the front lamp is not used.



CABLE ROUTING

Fork available with cable routing solution for a hub dynamo cable.

RST

CONTENTS

E-MTB **DH/ENDURO**

NEW R.EVO 29	10
NEW STITCH 29	12
REBEL V2	14
KILLAH	15
STITCH	
STORM	
ROGUE	16
TITAN	
BLADE PRO	18
BLADE	19
VIBE	20

DROPPER

ELEV8 E	21
ELEV8 H	22
ELEV8 A2	

JUNIOR

NEW FIRST	24
NEW AERIAL	25
SNYPER	26
CAPA	

E-MTB **XC**

REVEAL	28
FIRST	29
AERIAL	30
ALPHA	31
OMEGA	32
NEW BLAZE	33
GILA	34

DIRT JUMP

SPACE	36
SLOPE	37
SHINE	
DIRT	38

E-CITY **TREKKING**

NEW AVION	40
PULSE	
VOLTA	41
FLI & PLS	
VOLAIR E	42
VOLAR	
VOGUE E	43
VIVAIR E	
VOLANT	44
AVALON	
VOGUE	45
VIV AIR	
VITA	46
ANGEL	
NOVA	47
VERSE	
NEON PLS	48

GRAVEL

NEW SINGLE SHOCK	49
STEM SHOCK	50

CARGO

NEW BEAST	52
PORTER	53
GARY	

E-MOTO


NEW SIGMA	54
NEW MEZZO	

FAT

GUIDE	55
GUIDE DC	
RENEGADE	56

ACCESSORIES	57
DIMENSIONS	61
SPECIFICATIONS	63
GLOBAL PARTNERS	81

COLOR OPTIONS



DK-0011
GLOSS WHITE
(YS-701)



DK-0012
PEARL WHITE
(YS-775)



DK-8010
MATT BLACK
(YS-727)



DK-8011
SHINY BLACK
(YS-728)

RST

MONO DPU / R

The brand new MONO is the perfect match for your ROGUE, REBEL or BLADE fork for aggressive AM trails or even race tracks. Being super light, yet plush and potent, it will offer an all needed performance upgrade for your FS bike.

We have you covered as it is offered in numerous metric and legacy sizings.



TRUNNION

SIZE	
	145 * 30mm
	145 * 35mm
	165 * 40mm
	165 * 45mm
	185 * 50mm
	185 * 55mm
	205 * 60mm
	205 * 65mm



STANDARD

SIZE	
	170 * 30mm
	170 * 35mm
	190 * 40mm
	190 * 45mm
	210 * 50mm
	210 * 55mm
	230 * 60mm
	230 * 65mm



A full-page photograph of a mountain biker in a red suit and helmet performing a jump in a forest. The biker is in mid-air, with the front wheel slightly higher than the rear wheel. The background is a dense forest with many thin trees and some green foliage. The lighting is natural, suggesting daytime.

R.EVO 29

The by far most lightweight 29er DH fork RST has ever been creating. 38mm chassis with 110x20mm Boost axle is giving you maximum control. Combined with top notch damper & air spring design, the R.EVO is the perfect match for the toughest lines on the planet.

Rider Fred Austruy Photo by Thomas Heydon



R.EVO 29

MODEL	29 AIR	29 COIL
Max Tire	29"x2.8"	
Spring	Air3	Coil
Damper	OCR2+	
	Compress adjust	
	Rebound adjust	
Steerer	28.6mm Aluminum	
Stanchion	38mm	
	Hard Anodize Black Aluminum	
Lower	Magnesium	
	20*110 mm Bolt Axle (Boost)	
Lamp Mount	-	
Fender Mount	mudguard/long fender	
Travel	200mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	



E-MTB





STITCH 29

The ultimate 38mm stanchion, 29er trail tool with some tricks up its sleeves when it comes to the most advanced builds currently possible. Shredding harsh lines or ending in long travel SUV builds supporting ABS mounts, this fork got you all covered.

Rider Fred Austruy Photo by Thomas Heydon



STITCH 29

MODEL	29 AIR	29 COIL
Max Tire	29"x2.8"	
Spring	Air3	Coil
Damper	OCR2+	
	Compress adjust	
	Rebound adjust	
Steerer	1.5" / 1.8" Aluminum tapered	
Stanchion	38mm	
	Hard Anodize Black Aluminum	
	Magnesium	
Lower	20*110 mm Bolt Axle (Boost)	
	15*110 mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	160, 170, 180mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	



E-MTB



A full-page photograph of a mountain biker in mid-air, performing a jump in a dense forest of tall, thin trees. The rider is wearing a helmet, a light-colored shirt, and patterned shorts. The bike is a full-suspension mountain bike with a blue frame. The scene is captured in a cinematic style with warm, golden-hour lighting filtering through the trees.

REBEL V2

Supreme inverted 29er trail fork that definitely stands out among its rivals. Swappable axle system makes it easy to adjust the outstanding comfort that comes with the inverted build. Stanchion guards support the moto optics, we love that fork.

Rider Louis Masson Photo by Konstantin Masson



REBEL V2

MODEL	AIR	AIR w/o Lockout
Max Tire	29"x2.4" or 27.5"x3.0"	
Spring	Air	
Damper	OCR+	
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered	
Stanchion	32mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	20*110 mm Bolt Axle (boost) 15*110 mm Bolt Axle	
Lamp Mount	-	
Fender Mount	mudguard	
Travel	80, 100, 130, 140, 150mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	

*Remote Lockout available



E-MTB





KILLAH

MODEL	27.5 / 26 AIR	27.5 / 26 COIL
Max Tire	27.5"x2.4" or 26"x2.4"	
Spring	Air Cartridge	Coil
Damper	OCR2+	
	Compress adjust	
	Rebound adjust	
Steerer	28.6mm Aluminum	
Stanchion	36mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	20*110mm Bolt Axle	
Lamp Mount	-	
Fender Mount	mudguard	
Travel	200mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	



E-MTB



STITCH

STORM

MODEL	27.5 / 26 AIR	27.5 / 26 COIL	27.5 / 26 RA
Max Tire	27.5"x2.4" or 26"x2.4"		
Spring	Air3	Coil	Coil
Damper	OCR2+		RA
	Compress adjust		Rebound adjust
	Rebound adjust		
Steerer	1.5"Aluminum tapered 28.6mm Aluminum		1.5"Aluminum tapered 28.6mm Cr-Mo Steel
Stanchion	36mm		
	Hard Anodize Black Aluminum		QPQ Black Steel
Lower	Magnesium		
	20*110mm QR Axle		
Lamp Mount	-		
Fender Mount	mudguard		
Travel	160, 170, 180mm		
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)		



E-MTB





ROGUE

MODEL	110-15 AIR	110-15 AIR w/o Lockout
Max Tire	29"x2.25" or 27.5"x3.0"(boost) 27.5"x2.4" or 26"x2.4"(Non boost)	
Spring	Air3	
Damper	OCR2+	
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered 28.6mm Aluminum(Non boost)	
Stanchion	34mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	15*110mm QR Axle	
Lamp Mount	-	
Fender Mount	mudguard/long fender(boost) mudguard(Non boost)	
Travel	120, 130, 140, 150, 160mm(boost) 140, 150, 160mm(Non boost)	
Brake Type (Rotor Size)	Post-Mount Disc (180 - 220mm max.)	

*Non boost available

*Remote Lockout available



E-MTB



TITAN

MODEL	110-15 AIR	110-15 AIR w/o Lockout
Max Tire	29"x2.25" or 27.5"x3.0"(boost) 27.5"x2.4" or 26"x2.4"(Non boost)	
Spring	Air3	
Damper	BO-TNL	HCR
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered 28.6mm Aluminum(Non boost)	
Stanchion	34mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	15*110mm QR Axle	
Lamp Mount	-	
Fender Mount	mudguard/long fender(boost) mudguard(Non boost)	
Travel	120, 130, 140, 150mm(boost) 140, 150mm(Non boost)	
Brake Type (Rotor Size)	Post-Mount Disc (180 - 220mm max.)	

*Non boost available

*Remote Lockout available



E-MTB



A full-page photograph of a mountain biker in a forest. The rider is wearing a black long-sleeved jersey, black shorts, and yellow and black patterned socks. They are riding a blue and black mountain bike with large tires. The rider is in a dynamic pose, leaning forward. The background is a dense forest of tall, thin trees with green foliage. The lighting is bright, suggesting a sunny day.

BLADE PRO

Upcoming trail star. Featuring 35mm stanchions for a fine balance in between stiffness and weight. This fork will take some beating on trail adventures around the globe. Reliable, well balanced air spring and damper systems support you with comfort on all your rides, all year long. Available in 15x110mm Boost for your 29er or even 27.5 ED / AM bike or Ebike builds.

Rider Louis Masson Photo by Jan Alwers



BLADE PRO

MODEL	110-15 AIR	110-15 AIR w/o Lockout
Max Tire	29"x2.8" or 27.5"x2.8"	
Spring	Air3	
Damper	BO-TNL	HCR
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered	
Stanchion	35mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*110mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	29": 130, 140, 150mm 27.5": 100, 120, 140mm	
Brake Type (Rotor Size)	Post-Mount Disc (180 - 220mm max.)	

*Remote Lockout available





BLADE

MODEL	110-15 AIR-TNL	110-15 AIR-TNL-R	110-15 TNL	110-15 TNL-R
Max Tire	29"x2.8" or 27.5"x2.8"			
Spring	Air Cartridge		Coil (Preload Adjust)	
Damper	TNL-F	TNL-R	TNL-F	TNL-R
	Lock-Out Fixed Rebound	Rebound adjust Lock-Out	Lock-Out Fixed Rebound	Rebound adjust Lock-Out
Steerer	1.5" Steel tapered			
Stanchion	34mm Steel			
	QPQ Black			
Lower	Aluminum			
	15*110mm Bolt Axle			
Lamp Mount	FLI			
Fender Mount	mudguard/long fender			
Travel	29": 120, 130, 140, 150, mm 27.5": 100, 120, 140mm			
Brake Type (Rotor Size)	Post-Mount Disc (180 - 220mm max.)			

*Remote Lockout available





VIBE

MODEL	110-15 AIR-RA	110-15 AIR-TNL	110-15 RA	110-15 TNL
Max Tire	29"x2.25" or 27.5"x3.0"(boost) 27.5"x2.4"(Non boost)			
Spring	Air Cartridge		Coil (Preload Adjust)	
Damper	RA	TNL	RA	TNL
	Rebound adjust	Lock-Out	Rebound adjust	Lock-Out
Steerer	1.5" Steel tapered			
Stanchion	34mm Steel			
	QPQ Black			
Lower	Magnesium			
	15*110mm Bolt Axle			
Lamp Mount	-			
Fender Mount	mudguard/long fender(boost) mudguard(Non boost)			
Travel	100, 120, 130, 140mm(boost) 130,140(Non boost)			
Brake Type (Rotor Size)	Post-Mount Disc (180 - 220mm max.)			

*Non boost available

*Remote Lockout available



E-MTB



ELEV8 E

Model	E
Function	Hydraulic Height Adjustment
Travel	100, 125, 150mm
Feature	Electronic Remote Operated
	30.9 / 31.6mm
Length	420mm (100mm travel)
	445mm (125mm travel)
	510mm (150mm travel)



A modern bike is definitely equipped with a dropper.

They even reach XC and City bike categories - as they are the last missing bit to make the bike suit the rider perfectly in all riding conditions.

The ELEV8 series comes in travels from 80mm up to 170mm.

Covering next generation kids riders up to the ambitious ED rider with the perfect drop they will need for riding.





ELEV8 H

Model	H-S	H
Function	Hydraulic Height Adjustment	
Travel	100, 125, 150mm	
Feature	Internal Cable Routing Remote Operated	External Cable Routing Remote Operated
	30.9 / 31.6mm	
Length	365mm (100mm travel) 414mm (125mm travel) 439mm (150mm travel)	



ELEV8 A2

Model	A2	A2-0
Function	Air Height Adjustment	
Travel	80, 100, 125, 150, 170mm	
Feature	Internal Cable Routing Remote Operated 10mm Setback	Internal Cable Routing Remote Operated
	30.9 / 31.6mm	30.9 / 31.6 / 34.9mm
Length	322mm (80mm travel) 362mm (100mm travel) 412mm (125mm travel) 462mm (150mm travel) 497mm (170mm travel)	



A full-page background image showing a mountain biker in motion on a forest trail. The rider is wearing a multi-colored jersey, a full-face helmet, and gloves. The background is a blurred forest scene, emphasizing speed and movement.

JUNIOR

hand in hand with a new generation of riders, RST has been refining the product lineup covering everything from XC to AM in order to offer something that those kids can go shredding with. Our approach for the junior category: nothing less than the best value for the money spent. What we are getting in return? Big smiles of the juniors coming back from their rides.

Rider Jay Ruan **Photo by** Lynn Chiu



F1RST

MODEL	26 AIR	24 AIR	20 AIR
Max Tire	26"x2.4"	24"x2.6"	20"x2.4"
Spring	Air3		Air
Damper	BO-TNL		
	Compress adjust		
	Rebound adjust		
	Lock-Out		
Steerer	1.5" Aluminum tapered 28.6mm Aluminum		
Stanchion	32mm Aluminum		
	Hard Anodize Black		
	Magnesium		
Lower	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	-		
Fender Mount	mudguard/long fender		
Travel	60, 80, 100, 120mm		60, 80, 100mm
Brake Type (Rotor Size)	Post-Mount Disc (160 - 180mm max.)		

*Remote Lockout available





AERIAL

MODEL	26 TNL	26 MLC	24 TNL	20 TNL
Max Tire	26"x2.4"		24"x2.6"	20"x2.4"
Spring	Air Cartridge			
Damper	TNL-F	MLC	TNL-F	TNL-F
	Lock-Out Fixed Rebound	Mechanic-Lock-Out	Lock-Out Fixed Rebound	Lock-Out Fixed Rebound
Steerer	1.5" Aluminum tapered 28.6mm Aluminum			
Stanchion	32mm Steel			
	QPQ Black			
Lower	Magnesium			
	15*100mm Bolt Axle 9*100mm Open Dropout			
Lamp Mount	-			
Fender Mount	mudguard/long fender			
Travel	60, 80, 100, 120mm			60, 80, 100 mm
Brake Type (Rotor Size)	Post-Mount Disc (160 - 180mm max.)			

*Remote Lockout available





SNYPER

MODEL	24 AIR
Max Tire	24"x2.2"
Spring	Air3
Damper	BO-TNL
	Compress adjust
	Rebound adjust
	Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum
Stanchion	32mm Aluminum
	Hard Anodize Black
Lower	Magnesium
	9*100mm Open Dropout
Lamp Mount	-
Fender Mount	mudguard/long fender
Travel	60, 70, 80, 100, 120mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)

*Remote Lockout available



CAPA

MODEL	24 MLC	20 / 24 T
Max Tire	24"x2.2"	24"x2.2"/20"x2.2"
Spring	Coil (Preload Adjust)	
Damper	MLC	-
	Mechanic-Lock-Out	-
Steerer	28.6 / 25.4mm Steel	
Stanchion	25.4mm Steel	
	CP Finish	
Lower	Aluminum	
	9*100mm Open Dropout	
Lamp Mount	-	-
Fender Mount	mudguard/long fender	
Travel	50mm	
Brake Type / Rotor Size	IS-Mount Disc (140 - 160mm max.)	
	D+V-Brake	





XC

Lightweight and efficient suspension from 80mm to 140mm distinguish the XC and touring lineups. Forks with a perfectly balanced mixture of comfort, performance and trail control ready for enjoying your local trail network to competing in the toughest race events.



REVEAL

MODEL	110-15 AIR	110-15 AIR-TRL
Max Tire	29"x2.6" or 27.5"x2.8"	
Spring	Air3	
Damper	OCR+	
	Compress adjust Rebound adjust Lock-Out	Rebound adjust Remote Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	32mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	15*110mm Bolt Axle(boost)	
	15*100mm QR Axle(Non boost)	
Lamp Mount	-	
Fender Mount	mudguard/long fender	
Travel	80, 100, 120mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

*Non boost available



E-MTB





FIRST

MODEL	110-15 AIR	110-9 29 / 27.5+ AIR	110-9 27.5 / 26 AIR
Max Tire	29"x2.6" or 27.5"x2.8"	29"x2.4" or 27.5"x2.8"	27.5"x2.6" or 26"x3.0"
Spring	Air3		
Damper	BO-TNL		
	Compress adjust Rebound adjust Lock-Out		
Steerer	1.5" Aluminum tapered 28.6mm Aluminum		
Stanchion	32mm Aluminum		
	Hard Anodize Black		
Lower	Magnesium		
	15"110mm Bolt Axle	9"110mm Open Dropout	
Lamp Mount	-		
Fender Mount	mudguard/long fender	mudguard	
Travel	80, 100, 120mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Non boost available

*Remote Lockout available



E-MTB





AERIAL

MODEL	110-15 TNL	110-15 MLC	110-9 29 / 27.5+ TNL	110-9 29 / 27.5+ MLC	110-9 27.5 / 26 TNL	110-9 27.5 / 26 MLC
Max Tire	29"x2.6" or 27.5"x2.8"		29"x2.4" or 27.5"x2.8"		27.5"x2.6" or 26"x3.0"	
Spring	Air Cartridge					
Damper	TNL	MLC	TNL	MLC	TNL	MLC
	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum					
Stanchion	32mm Steel					
	QPQ Black					
Lower	Magnesium					
	15"110mm Bolt Axle		9"110mm Open Dropout			
Lamp Mount	-					
Fender Mount	mudguard/long fender		mudguard			
Travel	80, 100, 120mm					
Brake Type (Rotor Size)	Post-Mount Disc (160 - 220mm max.)					

*Non boost available

*Remote Lockout available



E-MTB





ALPHA

MODEL	110-15 29 / 27.5+ RA	110-15 29 / 27.5+ TNL	110-15 29 / 27.5+ MLC	110-15 29 / 27.5+ T	110-9 29 / 27.5+ RA	110-9 29 / 27.5+ TNL	110-9 29 / 27.5+ MLC	110-9 29 / 27.5+ T	110-9 27.5 / 26 RA	110-9 27.5 / 26 TNL	110-9 27.5 / 26 MLC	110-9 27.5 / 26 T
Max Tire	29"x2.6" or 27.5"x2.8"				29"x2.4" or 27.5"x2.8"				27.5"x2.6" or 26"x3.0"			
Spring	Coil (Preload Adjust)											
Damper	RA	TNL	MLC	-	RA	TNL	MLC	-	RA	TNL	MLC	-
	Rebound adjust	Lock-Out	Mechanic- Lock-Out	-	Rebound adjust	Lock-Out	Mechanic- Lock-Out	-	Rebound adjust	Lock-Out	Mechanic- Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel											
Stanchion	32mm Steel											
	CP Finish											
Lower	Magnesium											
	15"110mm Bolt Axle				9"110mm Open Dropout							
Lamp Mount	-											
Fender Mount	mudguard/long fender				mudguard							
Travel	80, 100, 120, 130, 135mm				80, 100, 120, 130, 140mm							
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)											

*Remote Lockout available



E-MTB





OMEGA

MODEL	29 TNL	29 MLC	29 T	27.5 TNL	27.5 MLC	27.5 T	26 TNL	26 MLC	26 T
Max Tire	29"x2.6"			27.5"x2.4"			26"x2.4"		
Spring	Coil (Preload Adjust)								
Damper	TNL	MLC	-	TNL	MLC	-	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel								
Stanchion	32mm Steel								
	CP Finish								
Lower	Magnesium								
	15"100mm Bolt Axle 9"100mm Open Dropout								
Lamp Mount	-								
Fender Mount	mudguard/long fender								
Travel	80, 100, 120mm								
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)								

*Remote Lockout available





BLAZE

MODEL	29 TNL	29 MLC	29 T	27.5 TNL	27.5 MLC	27.5 T
Max Tire	29"x2.6"			27.5"x2.6"		
Spring	Coil (Preload Adjust)					
Damper	TNL	MLC	-	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel			28.6mm Steel		
Stanchion	32mm Steel			30mm Steel		
	CP Finish					
Lower	Aluminum					
	15*100mm Bolt Axle 9*100mm Open Dropout					
Lamp Mount	FLI			-		
Fender Mount	mudguard/long fender					
Travel	80, 100, 120mm					
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)					

*Remote Lockout available



E-MTB





GILA

MODEL	29 TNL	29 MLC	29 T
Max Tire	29"x2.4"		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	28.6mm Steel		
Stanchion	28.6mm Steel		
	CP Finish		
Lower	Aluminum		
	9*100mm Open Dropout		
Lamp Mount	-		
Fender Mount	mudguard/long fender		
Travel	80, 100, 120mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available





DIRT JUMP

The fork series for DIRT riders – Increased durability and ready for air time. Tough, short travel design combined with a top performing damping system make for forks ready to take on the toughest lines on the planet.

Rider Fred Austruy Photo by Thomas Heydon



SPACE

MODEL	JUMP	FREE
Max Tire	26"x2.4"	
Spring	Air3	Coil
Damper	RA	
	Rebound adjust	
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	28.6mm Cr-mo Steel
Stanchion	36mm Aluminum	36mm Steel
	Hard Anodize Black	QPQ Black
Lower	Magnesium	
	20*110mm Bolt Axle 15*100mm Bolt Axle	
Lamp Mount	-	-
Fender Mount	mudguard	
Travel	80, 100mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	





SLOPE

MODEL	HC
Max Tire	27.5"x2.4" or 26"x2.4"
Spring	Air3
Damper	OCR+
	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered 28.6mm Aluminum
Stanchion	34mm Aluminum
	Hard Anodize Black
Lower	Magnesium
	15*100mm QR Axle
Lamp Mount	-
Fender Mount	mudguard
Travel	80, 100, 130mm
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)



SHINE

MODEL	RA
Max Tire	26"x2.4"
Spring	Air Cartridge
Damper	RA
	Rebound adjust
Steerer	1.5" Steel tapered
Stanchion	34mm Steel
	QPQ Black
Lower	Magnesium
	15*100mm Bolt Axle
Lamp Mount	-
Fender Mount	mudguard
Travel	80, 100, 130mm
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)





DIRT

MODEL	RA	R
Max Tire	26"x2.2"	
Spring	Coil (Preload Adjust)	
Damper	RA	R
	Rebound adjust	Fixed Rebound
Steerer	28.6mm Cr-Mo Steel	
Stanchion	32mm Steel	
	CP Finish	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	-	
Fender Mount	mudguard	
Travel	RA : 80, 100, 130mm R: 80, 100 mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	
	D+V-Brake	





E-CITY TREKKING

Comfortable forks for touring and city bikes with travel in between 50mm to 80mm. Efficient suspension forks that include mounting Options that allow use of integrated lights, fenders, dynamos and even roller brake use. Carefree technical systems allow convenient daily use.



AVION

MODEL	110-15 AIR	110-15 AIR w/o Lockout
Max Tire	29"x2.8"	
Spring	Air3	
Damper	BO-TNL	HCR
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered	
Stanchion	35mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*110mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	100/120mm	
Brake Type (Rotor Size)	Post-Mount Disc (180 - 220mm max.)	

*Remote Lockout available



PULSE

MODEL	29 AIR TNL	29 COIL TNL	27.5 AIR TNL	27.5 COIL TNL
Max Tire	29"x2.8"		27.5"x2.6"	
Spring	Air Cartridge	Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)
Damper	TNL			
	Lock-Out		Lock-Out	Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum			
Stanchion	32mm Steel		30mm Steel	
	QPQ Black			
Lower	Aluminum			
	15"100mm Bolt Axle 9"100mm Open Dropout			
Lamp Mount	-			
Fender Mount	mudguard/long fender			
Travel	50, 60, 80, 100mm		60, 80, 100mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)			

*Remote Lockout available





VOLTA

MODEL	AIR TRL	AIR
Max Tire	700x55C	
Spring	Air Cartridge	
	BO-TNL	
Damper	Rebound adjust Remote Lock-Out	Compress adjust Rebound adjust Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	32mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	



Light Mount Options

FLI



Front Light Integration

* Suitable for STITCH 29, BLADE PRO, BLADE, AVION, BLAZE 29, PULSE 29, VOLTA, VOLAIR E, VOLAR, BEAST 20&24



PLS



Post Lighting System

* Suitable for VOGUE E, VIVAIR E, VOLANT, AVALON, VOGUE, VIVAIR, VITA, NOVA, NOEN PLS, NEON, URBAN,





VOLAIR E

MODEL	RL	TNL
Max Tire	700x55C	
Spring	Air Cartridge	
Damper	TNL-F	
	Remote Lock-Out Fixed Rebound	Lock-Out Fixed Rebound
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	32mm Steel	
	QPQ Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	



VOLAR

MODEL	TNL	MLC	T
Max Tire	700x55C		
Spring	Coil (Preload Adjust)		
Damper	TNL-F	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	32mm Steel		
	CP Finish		
Lower	Aluminum		
	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	FLI		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available





VOGUE E

MODEL	AIR TRL	AIR
Max Tire	700x55C	
Spring	Air Cartridge	
Damper	OCR	
	Rebound adjust Remote Lock-Out	Compress adjust Rebound adjust Lock-Out
Steerer	1.5" Aluminum tapered	
Stanchion	30mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	PLS	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	



VIVAIR E

MODEL	RL	TNL
Max Tire	700x55C	
Spring	Air Cartridge	
Damper	TNL	
	Remote Lock-Out	Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	30mm Steel	
	QPQ Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	PLS	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	





VOLANT

MODEL	TNL	MLC	T
Max Tire	700x55C		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	30mm Steel		
	CP Finish		
Lower	Aluminum		
	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	PLS		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available



AVALON

MODEL	27.5 TNL	27.5 MLC	27.5 T
Max Tire	27.5"x2.2" & 26"x2.4"		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	30mm Steel		
	CP Finish		
Lower	Aluminum		
	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	PLS		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available





VOGUE

MODEL	AIR TRL	AIR
Max Tire	700x50C	
Spring	Air	
Damper	OCR	
	Rebound adjust Remote Lock-Out	Compress adjust Rebound adjust Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	28.6mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	9*100mm Open Dropout	
Lamp Mount	PLS	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	
	D+V-Brake	



VIVAIR

MODEL	RL	TNL
Max Tire	700x50C	
Spring	Air Cartridge	
Damper	TNL	
	Remote Lock-Out	Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	28.6mm Steel	
	QPQ Black	
Lower	Magnesium	
	9*100mm Open Dropout	
Lamp Mount	PLS	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	
	D+V-Brake	





VITA

MODEL	TNL	MLC	T
Max Tire	700x50C		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	28.6mm Steel		
	CP Finish		
Lower	Magnesium		
	9"100mm Open Dropout		
Lamp Mount	PLS		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		
	D+V-Brake		

*Remote Lockout available



ANGEL

MODEL	26 TNL	26 MLC	26 T
Max Tire	26"x2.2"		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	28.6mm Steel		
Stanchion	28.6mm Steel		
	CP Finish		
Lower	Magnesium		
	9"100mm Open Dropout		
Lamp Mount	-		
Fender Mount	mudguard/long fender		
Travel	60, 75mm		
Brake Type / Rotor Size	IS-Mount Disc (140 - 160mm max.)		
	D+V-Brake		

*Remote Lockout available





NOVA

MODEL	TNL	MLC	T
Max Tire	700x50C		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	28.6mm Steel		
Stanchion	28.6mm Steel		
	CP Finish		
Lower	Aluminum		
	9*100mm Open Dropout		
Lamp Mount	PLS		
Fender Mount	mudguard/long fender		
Travel	50, 60mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		
	D+V-Brake		

*Remote Lockout available



VERSE

MODEL	TNL	MLC	T
Max Tire	700x50C		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	28.6 / 25.4mm Steel		
Stanchion	28.6mm Steel		
	CP Finish		
Lower	Aluminum		
	9*100mm Open Dropout		
Lamp Mount	-		
Fender Mount	mudguard/long fender		
Travel	40, 50mm		
Brake Type (Rotor Size)	V-Brake		

*Remote Lockout available





NEON PLS

MODEL	TNL	MLC	T
Max Tire	700x50C		
Spring	Coil (Preload Adjust)		
Damper	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	-
Steerer	28.6mm Steel		
Stanchion	28.6mm Steel		
	CP Finish		
Lower	Aluminum		
	9*100mm Open Dropout		
Lamp Mount	PLS		
Fender Mount	mudguard/long fender		
Travel	50, 60mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		
	D+V-Brake		

*Remote Lockout available

**The only RST fork allowing the use of a front motor



SINGLE SHOCK

MODEL	SS-A8	SS-A7-T	SS-A7	PILOT	SS 3.0
Max Tire	700x50C	700x50C	700x50C	700x47C	700 x 50C
Spring	Coil with MCU				
Steerer	28.6mm Aluminum (Optional 1.5" Aluminum tapered steerer) (210mm length min)			1.5"Aluminum tapered (210mm length min)	1.5" Aluminum tapered steerer module (210mm length min)
Lower	Alu. Blade				Customized
	9mm open dropout				
TRAVEL	35mm	30mm	35mm	40mm	35mm





STEM SHOCK

MODEL	W/ Lockout	W/O Lockout
Adjustable Angle	+4° / 0° / -4°	
Travel	20mm	
Lock-Out	V	-
	Fit into inner diameter ≥ 24.5mm steerer	
Length	Suspension system will add 35mm of height to the steerer tube	



A person wearing a blue jacket and a white helmet is riding a blue cargo bike on a paved path. The bike has a large white cargo box on the back. The path is next to a body of water, and there are trees and grass in the background. The word "CARGO" is written in large orange letters on the left side of the image.

CARGO

The cargo bike sector is gaining traction as the convenience of the use of a cargo bike in urban traffic is making people switch their habits and leave their cars parked. Evolving from regular bike forks, RST is offering the most sturdy series of compact cargo forks currently in the market, the BEAST series. With BOSCH ABS integration and flex resistant 36mm stanchions they are the perfect choice for heavy load cargo concepts.

Rider Stephan Guddat Photo by Hendrik Tafel



BEAST

MODEL	20 R	20 T	24 R	24 T
Max Tire	20"x2.6"		24"x2.6"	
Spring	Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Coil (Preload Adjust)	Dual Coil (Preload Adjust)
Damper	R	-	R	-
	Fixed Rebound	-	Fixed Rebound	-
Steerer	1.5" Cr-Mo Steel tapered			
Stanchion	36mm Steel			
	CP Finish			
Lower	Aluminum			
	15"110mm Bolt Axle		15"100mm Bolt Axle	
Lamp Mount	FLI			
Fender Mount	mudguard/long fender			
Travel	50, 60,70mm		50, 60, 70mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.)	





PORTER

MODEL	20 T
Max Tire	20"x2.4"
Spring	Dual Coil (Preload Adjust)
Damper	-
Steerer	28.6mm Cr-Mo Steel
Stanchion	30mm Steel CP Finish
Lower	Magnesium 15*100mm Bolt Axle 9*100mm Open Dropout
Lamp Mount	-
Fender Mount	mudguard/long fender
Travel	40 ,60, 80mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)



GARY

MODEL	20 T
Max Tire	20"x2.6"
Spring	Coil (Preload Adjust)
Damper	-
Steerer	28.6mm Steel
Stanchion	28.6mm Steel CP Finish
Lower	Aluminum 9*100mm Open Dropout
Lamp Mount	-
Fender Mount	mudguard
Travel	50mm
Brake Type / Rotor Size	IS-Mount Disc (140 - 160mm max.) D+V-Brake





SIGMA

MODEL	27.5 AIR	27.5 COIL	20 AIR
Max Tire	27.5"x2.4"		20"x4.0"
Spring	Air Cartridge	Coil	Air Cartridge
Damper	OCR+		HCR
	Compress adjust Rebound adjust		
Steerer	28.6mm Aluminum		
Stanchion	38mm Aluminum		36mm Aluminum
	Hard Anodize Black		
Lower	Aluminum		
	20*110mm Bolt Axle		15*135mm Bolt Axle
Lamp Mount	-		
Fender Mount	mudguard		
Travel	200mm		150mm
Brake Type / Rotor Size	Post-Mount Disc 220mm max.		Post-Mount Disc (180 - 220mm max.)



MEZZO

MODEL	COIL
Eye to Eye x Travel	265x85, 210x55, 190x50
Function	Compress adjust Rebound adjust Preload adjust
Spring	350lb/400lb/450lb/500lb/550lb
Ride style	AM/FR/DH/E-MOTO
Color	Black





GUIDE

MODEL	26 AIR-TNL	26 AIR-MLC	26 TNL	26 T	26 MLC	20 AIR-TNL	20 AIR-MLC	20 TNL	20 MLC	20 T
Max Tire	26"x4.6"					20"x4.6"				
Spring	Air Cartridge		Coil (Preload Adjust)			Air Cartridge		Coil (Preload Adjust)		
Damper	TNL	MLC	TNL	-	MLC	TNL	MLC	TNL	MLC	-
	Lock-Out	Mechanic-Lock-Out	Lock-Out	-	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel									
Stanchion	32mm Steel									
	CP Finish									
Lower	Aluminum									
	15*135mm Bolt Axle 9*135mm Open Dropout									
Lamp Mount	-					-				
Fender Mount	mudguard					mudguard/long fender				
Travel	75, 95, 120mm					45, 60mm				
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)									

*Remote Lockout available



GUIDE DC

MODEL	26 AIR	26 TNL	20 AIR	20 TNL	20 T
Max Tire	26"x4.6"		20"x4.6"		
Spring	Air Cartridge	Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)	
Damper	TNL				-
	Lock-Out	Lock-Out	Lock-Out	Mechanic- Lock-Out	-
Steerer	28.6mm Steel				
Stanchion	32mm Steel				
	CP Finish				
Lower	Aluminum				
	15"135mm Bolt Axle 9"135mm Open Dropout				
Lamp Mount	-				
Fender Mount	mudguard		mudguard/long fender		
Travel	80, 100, 120mm		50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)				





RENEGADE

MODEL	26 AIR	26 TNL
Max Tire	26"x4.0"	
Spring	Air3	Coil (Preload Adjust)
Damper	BO-TNL	TNL
	Compress adjust Rebound adjust Lock-Out	Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	1.5" Steel tapered
Stanchion	32mm Aluminum	32mm Steel
	Hard Anodize Black	CP Finish
Lower	Magnesium	
	15*150mm QR Axle	
Lamp Mount	-	
Fender Mount	mudguard/long fender	
Travel	80, 100, 120mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

*Remote Lockout available





RST FORK SEAL KITS

Only use genuine RST seals to keep your fork performing at its peak.
Seals keep the dust out and the grease in.
Sponge with oil can make fork compression smoothly.
SAG ring can help to measure SAG value easily.
The seal kits need to be replaced when worn.

MODEL	PART NO.	Fitments Available For
Seal kits for 38mm	#H5GBHJCJC01-KT	KILLAH 29, STITCH 29, R.EVO 29
Seal kits for 36mm	#H5FXY-2611-000-KT	KILLAH 27.5/26, STITCH 27.5/26, STORM, SPACE, BEAST 20/24
Seal kits for 35mm	#H5GBHPCKC1-KT	BLADE PRO, AVION
Seal kits for 34mm	#H5GBHECKC1-KT	ROGUE, TITAN, SLOPE, BLADE
Seal kits for 32mm	#H5GBH8CEC1-KT	REVEAL, SNYPER, RENEGADE, F1RST series, AERIAL 20/24/26



O-RING KIT

MODEL	PART NO.
O-ring kit for 38mm	
O-ring kit for 36mm	
O-ring kit for 34mm	H5GORHGMCO-AM
O-ring kit for 32mm	H5GORHGECO-AM
O-ring kit for 30mm	
O-ring kit for 28.6mm	



SPRING SEALS

MODEL	PART NO.	Fitments Available For
Seal for 32mm	#H5GBH8CEC1	AERIAL 110-15, ALPHA 110-15
Seal for 32mm	#H5GBHBAEC1	AERIAL 27.5/29/110-9, ALPHA 110-9, OMEGA 29/27.5, DIRT, PULSE 29, BLAZE 29, VOLAR, VOLAIR E, VOLTA
Seal for 30mm	#H5GBHCCCC1-1	SPEX
Seal for 30mm	#H5GBH8CDC2	OMEGA 26, BLAZE 27.5/29, PULSE 27.5, VOLANT, VIVAIR E, VOGUE E
Seal for 28.6mm	#H5GBHCCCC022	GILA 29, VOGUE, VIV AIR, VITA, NOVA, VERSE
Seal for 25.4 mm	#H5GBHCBC2	CAPA, NEON, URBAN



O-RING KIT REAR SHOCK

MODEL	PART NO.
MONO (Metric/Trunnion)	H5GBHQCKC1-1-AM
MONO (Imperial)	H5GBHQCKC1-2-AM



HIGH PRESSURE AIR PUMP

MODEL	PART NO.	Fitments Available For
High Pressure Air Pump	H5PFGP-2200-300	ALL RST Air forks



GREASE

MODEL	PART NO.	Fitments Available For
Lubrication Kit 50g	H5GACB182	ALL RST FORK
Lubrication Kit 5g	H5FA1-2990-000	STEM SHOCK



RST SPECIAL WRENCH

MODEL	PART NO.	Fitments Available For
RST wrench For preload adjusters	H5GAC616	All models with preload adjust & mechanical lockout function



CAPS

MODEL	PART NO.	Fitments Available For
Cap for 32mm	#H5GAEDMG29	OMEGA 29 T / 27.5 T, ALPHA T
Cap for 30mm	#H5GAEDMG275	OMEGA 26 T, VOLANT T, ALL BLAZE T series
Cap for 28.6mm	#H5GAE8MG030	GILA 26 T, VITA T, NOVA T, VERSE T
Cap for 25.4mm	#H5FH2-2340-000	CAPA T, NEON T, URBAN T

ADJUSTER (preload)

MODEL	PART NO.	Fitments Available For
Adjuster for 32mm	H5GAEAB29-1	DIRT
Adjuster for 32mm	H5GAE0A29-1	OMEGA 29/27.5, ALPHA series
Adjuster for 30mm	H5GAE0A30-1	OMEGA 26
Adjuster for 30mm	H5FVP-2162-100-1	BLAZE series, VOLANT
Adjuster for 28.6mm	H5FNM-2163-300-1	GILA 29
Adjuster for 28.6mm	H5FNM-2163-100-1	VITA, NOVA, VERSE
Adjuster for 25.4mm	H5FNA-2162-100-1	CAPA, NEON, URBAN



SMART REMOTE LOCK-OUT(SRL) UPGRADE KIT


MODEL	PART NO.	Fitments Available For
TRL Upgrade Kit	H5GDPMAR1-KT	All RST Forks
RL Upgrade Kit	H5GDPMAR3-KT	



MUDGUARD

MODEL	PART NO.	Fitments Available For
Mudguard	HACM-0316-001	All RST Forks

DIMENSIONS

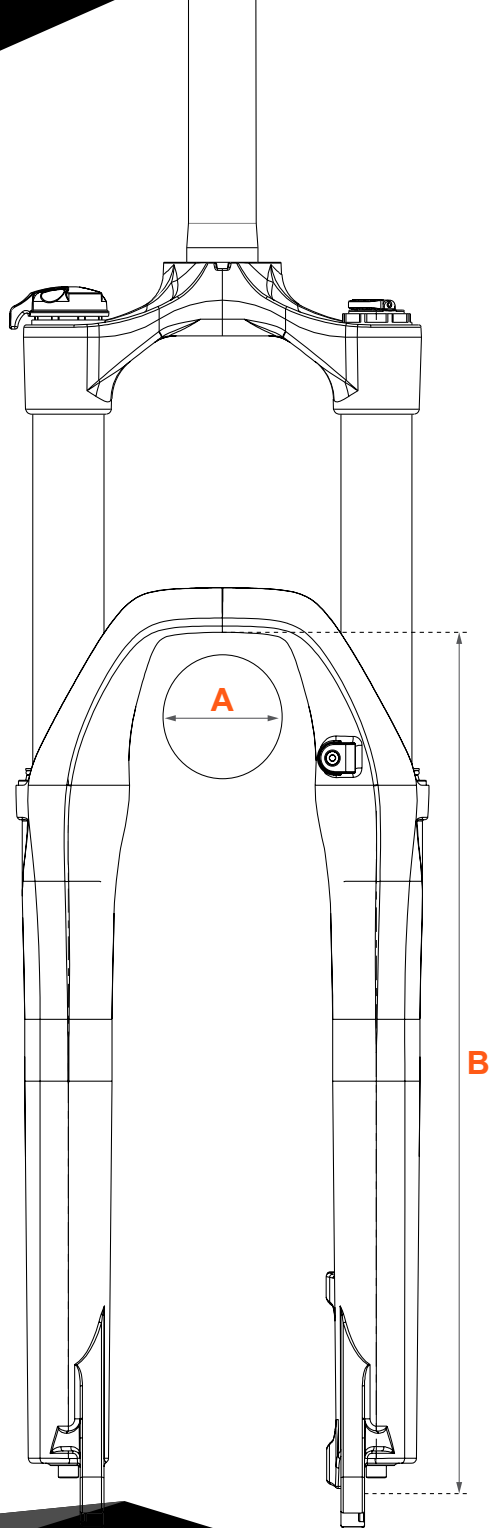

MODEL NAME	WIDTH A	FENDER MOUNT	HEIGHT B	MAXIMUM ROTOR SIZE
SIGMA 27.5	<63	-	-	220
REVO 29	<67	Yes	392	220
KILLAH 27.5&26	<63	-	365	220
STITCH 29	<67	Yes	392	220
STITCH 27.5&26	<63	-	365	220
STORM 27.5&26	<63	-	365	220
REBEL 29 / 27.5+	<76 for 27.5" + ; <63 for 29"	-	-	220
ROGUE 110-15	<76 for 27.5" + ; <58 for 29"	Yes	380	220
ROGUE 27.5&26	<63	-	365	220
TITAN 110-15	<76 for 27.5" + ; <58 for 29"	Yes	380	220
TITAN 27.5& 26	<63	-	365	220
VIBE 110-15	<76 for 27.5" + ; <58 for 29"	Yes	380	220
VIBE 27.5	<63	-	365	220
BLADE PRO	<67 for 29"	Yes	392	220
AVION	<67 for 29"	Yes	392	220
BLADE 110-15	<67 for 29"	Yes	392	220
REVEAL 110-15 29 / 27.5+	<73 for 27.5" + ; <67 for 29"	Yes	390	220
REVEAL 29&29-15	<67	Yes	385	220
REVEAL 27.5&27.5-15	<63	Yes	376	220
FIRST 110-15 29 / 27.5+	<73 for 27.5" + ; <67 for 29"	Yes	390	220
FIRST 110-9 29 / 27.5+	<73 for 27.5" + ; <63 for 29"	Yes	378	220
FIRST 110-9 27.5 / 26	<67 for 27.5" ; <76 for 26"	Yes	365	220
F1RST 29&29-15	<67	Yes	385	220
F1RST 27.5&27.5-15	<63	Yes	376	220
F1RST 26&26-15	<67	Yes	350	180
AERIAL 110-15 29 / 27.5+	<73 for 27.5" + ; <67 for 29"	Yes	390	220
AERIAL 110-9 29 / 27.5+	<73 for 27.5" + ; <63 for 29"	Yes	378	220

MODEL NAME	WIDTH A	FENDER MOUNT	HEIGHT B	MAXIMUM ROTOR SIZE
AERIAL 110-9 27.5 / 26	<67 for 27.5" ; <76 for 26"	Yes	365	220
AERIAL 29&29-15	<67	Yes	385	220
AERIAL 27.5&27.5-15	<63	Yes	376	220
AERIAL 26&26-15	<67	Yes	350	180
ALPHA 110-15 29 / 27.5+	<73 for 27.5" + ; <67 for 29"	Yes	390	220
ALPHA 110-9 29 / 27.5+	<73 for 27.5" + ; <63 for 29"	Yes	378	220
ALPHA 110-9 27.5 / 26	<67 for 27.5" ; <76 for 26"	Yes	365	220
SPACE 26	<63	-	365	220
SLOPE 27.5&26	<63	-	365	220
SHINE 26	<63	-	365	220
DIRT 26	<56	-	350	220
OMEGA 29&29-15	<67	Yes	385	220
OMEGA 27.5&27.5-15	<63	Yes	376	220
OMEGA 26	<63	Yes	350	220
BLAZE 29&29-15	<67	Yes	390	220
BLAZE 27.5&27.5-15	<63	Yes	370	220
GILA 29	<63	Yes	380	220
ANGEL 26	<56	-	355	160
SNYPER 24	<56	Yes	317	180
IGNITE 24	<56	Yes	317	180
FIRST 24&24-15	<67	Yes	334	180
FIRST 20&20-15	<63	Yes	281	180
AERIAL 24&24-15	<67	Yes	334	180
AERIAL 20&20-15	<63	Yes	281	180
CAPA 24	<56	Yes	322	160
CAPA 20	<56	Yes	289	160
BEAST 24-15	<67	Yes	337	220

MODEL NAME	WIDTH A	FENDER MOUNT	HEIGHT B	MAXIMUM ROTOR SIZE
BEAST 20-15	<67	Yes	283	220
PORTER 20-15	<63	Yes	290	220
GARY 20	<67	Yes	289	160
PULSE 29&29-15	<67	Yes	390	220
PULSE 27.5&27.5-15	<63	Yes	370	220
VOLTA	<55	Yes	385	220
VOGUE E	<55	Yes	382	220
VOLAIR E	<55	Yes	385	220
VIVAir E	<55	Yes	382	220
VOGUE	<50	Yes	382	220
VIVAir	<55	Yes	382	220
VITA	<55	Yes	382	220
VOLAR	<55	Yes	385	220
VOLANT	<55	Yes	381	220
AVALON 27.5	<63	Yes	360	220
NEON PLS	<50	Yes	381	220
NOVA	<50	Yes	381	220
VERSE	<50	Yes	377	-
URBAN	<50	Yes	377	160
SS-A8	<55	Yes	382	180
SS-A7	<55	Yes	382	180
PILOT	<47	Yes	372	160
RENEGADE 26	<102	Yes	390	220
GUIDE 26	<117	Yes	410	220
GUIDE 20	<117	Yes	330	220

BIKE CATEGORY	DOWN HILL				ENDURO							
Model	R.EVO		KILLAH		STITCH				STORM	REBEL V2		
	29 AIR	29 COIL	27.5 / 26 AIR	27.5 / 26 COIL	29 AIR	29 COIL	27.5 / 26 AIR	27.5 / 26 COIL	27.5/26 RA	AIR	AIR-TRL	AIR w/o Lockout
Max Tire (w/o fender)	29"x2.8"		27.5"x2.4" or 26"x2.4"		29"x2.8"		27.5"x2.4" or 26"x2.4"		27.5"x2.4" or 26"x2.4"	29"x2.4" or 27.5"x3.0"		
Spring	Air3	Coil	Air Cartridge	Coil	Air3	Coil	Air3	Coil	Coil	Air		
Damper	OCR2+		OCR2+		OCR2+				RA	OCR+		
	Compress adjust Rebound adjust		Compress adjust Rebound adjust		Compress adjust Rebound adjust				Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust
Lock-Out Remote	-		-		-		-		-	-	V	-
Steerer	28.6mm Aluminum		28.6mm Aluminum		1.5" / 1.8" Aluminum tapered		1.5" Aluminum tapered 28.6mm Aluminum		1.5" Aluminum tapered 28.6mm Cr-Mo Steel	1.5" Aluminum tapered		
Crown	145mm-Dual		138mm-Dual		145mm		138mm		138mm	140mm		
Stanchion	38mm Aluminum		36mm Aluminum		38mm Aluminum		36mm Aluminum		36mm Steel	32mm Aluminum		
	Hard Anodize Black		Hard Anodize Black		Hard Anodize Black				QPQ Black	Hard Anodize Black		
Lower	Magnesium		Magnesium		Magnesium				Magnesium	Magnesium		
	20*110 mm Bolt Axle (Boost)		20*110mm Bolt Axle		20*110 mm Bolt Axle (Boost) 15*110 mm Bolt Axle		20*110mm QR Axle		20*110mm QR Axle	20x110 mm Bolt Axle (boost) 15*110 mm Bolt Axle		
Lamp Mount	-		-		FLI		-		-	-		
Fender Mount	mudguard/long fender		mudguard		mudguard/long fender		mudguard		mudguard	mudguard		
Travel	200mm		200mm		160, 170, 180mm		160, 170, 180mm		160, 170, 180mm	80, 100, 130, 140, 150mm		
Fork Offset	51mm		43mm		51mm		43mm		43mm	43mm		
Fork Height	610mm		27.5": 580mm 26": 565mm		580 / 590 / 600mm		27.5": 555 / 565 / 575mm 26": 540 / 550 / 560mm		27.5": 555 / 565 / 575mm 26": 540 / 550 / 560mm	490 / 510 / 540 / 550 / 560mm		
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (180 - 220mm max.)	Post-Mount Disc (180 - 220mm max.)		
Origin of Production	Taiwan		Taiwan		Taiwan				Taiwan	Taiwan		

RST SPECIFICATION

ENDURO

ROGUE						TITAN						BLADE PRO		
110-15 AIR	110-15 AIR-TRL	110-15 AIR w/o Lockout	27.5/26 AIR	27.5/26 AIR-TRL	27.5/26 AIR w/o Lockout	110-15 AIR	110-15 AIR-TRL	110-15 AIR w/o Lockout	27.5/26 AIR	27.5/26 AIR-TRL	27.5/26 AIR w/o Lockout	110-15 AIR	110-15 AIR-TRL	110-15 AIR w/o Lockout
29"x2.25" or 27.5"x3.0"			27.5"x2.4" or 26"x2.4"			29"x2.25" or 27.5"x3.0"			27.5"x2.4" or 26"x2.4"			29"x2.8" or 27.5"x2.8"		
Air3						Air3						Air3		
OCR2+						BO-TNL		HCR	BO-TNL		HCR	BO-TNL		HCR
Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust
-	V	-	-	V	-	-	V	-	-	V	-	-	V	-
1.5" Aluminum tapered			1.5" Aluminum tapered 28.6mm Aluminum			1.5" Aluminum tapered			1.5" Aluminum tapered 28.6mm Aluminum			1.5" Aluminum tapered		
150mm			130mm			150mm			130mm			140mm		
34mm Aluminum						34mm Aluminum						35mm Aluminum		
Hard Anodize Black						Hard Anodize Black						Hard Anodize Black		
Magnesium						Magnesium						Aluminum		
15*110mm QR Axle			15*100mm QR Axle			15*110mm QR Axle			15*100mm QR Axle			15*110mm Bolt Axle		
-						-						FLI		
mudguard/long fender			mudguard			mudguard/long fender			mudguard			mudguard/long fender		
120, 130, 140, 150, 160mm			140, 150, 160mm			120, 130, 140, 150mm			140, 150mm			29": 130, 140, 150mm 27.5": 100, 120, 140mm		
51mm			43mm			51mm			43mm			54mm		
530 / 540 / 550 / 560 / 570mm			27.5":535 / 545 / 555mm 26": 530 / 540 / 550mm			530 / 540 / 550 / 560mm			27.5": 535 / 545mm 26": 530 / 540mm			29": 550 / 560 / 570mm 27.5": 510 / 530 / 550mm		
Post-Mount Disc (180 - 220mm max.)						Post-Mount Disc (180 - 220mm max.)						Post-Mount Disc (180 - 220mm max.)		
Taiwan						Taiwan						Taiwan		

BIKE CATEGORY	E-SUV			ENDURO							
Model	AVION			BLADE							
	110-15 AIR	110-15 AIR-TRL	110-15 AIR w/o Lockout	110-15 AIR-TNL	110-15 AIR-RL	110-15 AIR-TNL-R	110-15 AIR-RL-R	110-15 TNL	110-15 RL	110-15 TNL-R	110-15 RL-R
Max Tire (w/o fender)	29"x2.8"			29"x2.8" or 27.5"x2.8"							
Spring	Air3			Air Cartridge				Coil (Preload Adjust)			
Damper	BO-TNL		HCR	TNL-F		TNL-R		TNL-F		TNL-R	
	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Lock-Out Fixed Rebound		Rebound adjust Lock-Out		Lock-Out		Rebound adjust Lock-Out	
Lock-Out Remote	-	V	-	-	V	-	V	-	V	-	V
Steerer	1.5" Aluminum tapered			1.5" Steel tapered							
Crown	140mm			140mm							
Stanchion	35mm Aluminum			34mm Steel							
	Hard Anodize Black			QPQ Black							
Lower	Aluminum			Aluminum							
	15*110mm Bolt Axle			15*110mm Bolt Axle							
Lamp Mount	FLI			FLI							
Fender Mount	mudguard/long fender			mudguard/long fender							
Travel	100, 120mm			29": 120, 130, 140, 150mm 27.5": 100, 120, 140mm							
Fork Offset	54mm			54mm							
Fork Height	520/540mm			29": 540 / 550 / 560 / 570mm 27.5": 510 / 530 / 550mm							
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)			Post-Mount Disc (180 - 220mm max.)							
Origin of Production	Taiwan			China							

RST SPECIFICATION

ENDURO

VIBE											
110-15 AIR-RA	110-15 AIR-RL	110-15 AIR-TNL	110-15 RA	110-15 RL	110-15 TNL	27.5 AIR-RA	27.5 AIR-RL	27.5 AIR-TNL	27.5 RA	27.5 RL	27.5 TNL
29"x2.25" or 27.5"x3.0"						27.5"x2.4"					
Air Cartridge			Coil (Preload Adjust)			Air Cartridge			Coil (Preload Adjust)		
RA	TNL		RA	TNL		RA	TNL		RA	TNL	
Rebound adjust	Lock-Out		Rebound adjust	Lock-Out		Rebound adjust	Lock-Out		Rebound adjust	Lock-Out	
-	V	-	-	V	-	-	V	-	-	V	-
1.5" Steel tapered											
150mm						130mm					
34mm Steel											
QPQ Black											
Magnesium											
15*110mm Bolt Axle						15*100mm Bolt Axle					
-											
mudguard/long fender						mudguard					
100, 120, 130, 140mm						130, 140mm					
51mm						43mm					
510 / 530 / 540 / 550mm						525 / 535mm					
Post-Mount Disc (180 - 220mm max.)											

China

BIKE CATEGORY	JUNIOR													
Model	F1RST						AERIAL							
	26 AIR	26 AIR TRL	24 AIR	24 AIR TRL	20 AIR	20 AIR TRL	26 RL	26 TNL	26 MLC	24 RL	24 TNL	24 MLC	20 RL	20 TNL
Max Tire (w/o fender)	26"x2.4"		24"x2.6"		20"x2.4"		26"x2.4"			24"x2.6"			20"x2.4"	
Spring	Air3				AIR		Air Cartridge							
Damper	BO-TNL						TNL-F		MLC	TNL-F		MLC	TNL-F	
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Lock-Out Fixed Rebound		Mechanic-Lock- Out	Lock-Out Fixed Rebound		Mechanic-Lock- Out	Lock-Out Fixed Rebound	
Lock-Out Remote	-	V	-	V	-	V	V	-	-	V	-	-	V	-
Steerer	1.5" Aluminum tapered 28.6mm Aluminum						1.5" Aluminum tapered 28.6mm Aluminum							
Crown	130mm						130mm							
Stanchion	32mm Aluminum						32mm Steel							
	Hard Anodize Black						QPQ Black							
Lower	Magnesium						Magnesium							
	15*100mm Bolt Axle 9*100mm Open Dropout						15*100mm Bolt Axle 9*100mm Open Dropout							
Lamp Mount	-						-							
Fender Mount	mudguard/long fender						mudguard/long fender							
Travel	60, 80, 100, 120mm				60, 80, 100mm		60, 80, 100,120mm						60, 80, 100mm	
Fork Offset	38mm						38mm							
Fork Height	440 / 460 / 480 / 500mm		419 / 439 / 459 / 479mm		370 / 390 / 410mm		440 /460 / 480 / 500mm			419 / 439 / 459 / 479mm			370 / 390 / 410mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)						Post-Mount Disc (160 - 180mm max.)							
Origin of Production	Taiwan						Taiwan							

RST SPECIFICATION

JUNIOR				XC					
SNYPER		CAPA		REVEAL					
24 AIR	24 TRL	24 MLC	20 / 24 T	110-15 AIR	110-15 AIR-TRL	29 AIR	29 AIR TRL	27.5 AIR	27.5 AIR TRL
24"x2.2"		24"x2.2"	24"x2.2"/20"x2.2"	29"x2.6" or 27.5"x2.8"		29"x2.6"		27.5"x2.4"	
Air3		Coil (Preload Adjust)		Air3					
BO-TNL		MLC	-	OCR+					
Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Mechanic-Lock-Out	-	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out
-	V	-	-	-	V	-	V	-	V
1.5" Aluminum tapered 28.6mm Aluminum		28.6 / 25.4mm Steel		1.5" Aluminum tapered 28.6mm Aluminum					
130mm		120mm		140mm		130mm			
32mm Aluminum		25.4mm Steel		32mm Aluminum					
Hard Anodize Black		CP Finish		Hard Anodize Black					
Magnesium		Aluminum		Magnesium					
9*100mm Open Dropout		9*100mm Open Dropout		15*110mm Bolt Axle		15*100mm QR Axle 9*100mm Open Dropout			
-		-		-					
mudguard/long fender		mudguard/long fender		mudguard/long fender					
60, 70, 80, 100, 120mm		50mm		80, 100, 120mm					
38mm		38mm		51mm		51mm		43mm	
410 / 420 / 430 / 450 / 470mm		399mm	24": 399mm 20": 373mm	500 / 520 / 540mm		495 / 515 / 535mm		485 / 505 / 525mm	
Post-Mount Disc (160 - 180mm max.)		IS-Mount Disc (140 - 160mm max.) IS-Mount Disc+V-Brake		Post-Mount Disc (160 - 220mm max.)					
Taiwan		China		Taiwan					

BIKE CATEGORY	XC																
Model	F1RST										AERIAL						
	110-15 AIR	110-15 AIR-TRL	110-9 29 / 27.5+ AIR	110-9 29 / 27.5+ AIR-TRL	110-9 27.5 / 26 AIR	110-9 27.5 / 26 AIR-TRL	29 AIR	29 AIR TRL	27.5 AIR	27.5 AIR TRL	110-15 TNL	110-15 TNL-F	110-15 TNL-R	110-15 RL	110-15 RL-F	110-15 RL-R	110-15 MLC
Max Tire (w/o fender)	29"x2.6" or 27.5"x2.8"		29"x2.4" or 27.5"x2.8"		27.5"x2.6" or 26"x3.0"		29"x2.6"		27.5"x2.4"		29"x2.6" or 27.5"x2.8"						
Spring	Air3		Air3				Air3				Air Cartridge						
Damper	BO-TNL						BO-TNL				TNL	TNL-F	TNL-R	TNL	TNL-F	TNL-R	MLC
	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Lock-Out	Lock-Out Fixed Rebound	Rebound adjust Lock-Out	Lock-Out	Lock-Out Fixed Rebound	Rebound adjust Lock-Out	Mechanic- Lock-Out
Lock-Out Remote	-	V	-	V	-	V	-	V	-	V	-			V			-
Steerer	1.5" Aluminum tapered 28.6mm Aluminum										1.5" Aluminum tapered 28.6mm Aluminum						
Crown	140mm		140mm				130mm				140mm						
Stanchion	32mm Aluminum										32mm Steel						
	Hard Anodize Black										QPQ Black						
Lower	Magnesium										Magnesium						
	15*110mm Bolt Axle		9*110mm Open Dropout				15*100mm QR Axle 9*100mm Open Dropout				15*110mm Bolt Axle						
Lamp Mount	-										-						
Fender Mount	mudguard/long fender		mudguard				mudguard/long fender				mudguard/long fender						
Travel	80, 100, 120mm										80, 100, 120mm						
Fork Offset	51mm		51mm		43mm		51mm		43mm		51mm						
Fork Height	500 / 520 / 540mm		490 / 510 / 530mm		27.5": 475 / 495 / 515mm 26": 460 / 480 / 500mm		495 / 515 / 535mm		485 / 505 / 525mm		500 / 520 / 540mm						
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)										Post-Mount Disc (160 - 220mm max.)						
Origin of Production	Taiwan										Taiwan						

RST SPECIFICATION

XC

AERIAL																			
110-9 29 / 27.5+ RL	110-9 29 / 27.5+ TNL	110-9 29 / 27.5+ MLC	110-9 27.5 / 26 RL	110-9 27.5 / 26 TNL	110-9 27.5 / 26 MLC	29 RL-R	29 TNL-R	29 RL-F	29 TNL-F	29 RL	29 TNL	29 MLC	27.5 RL-R	27.5 TNL-R	27.5 RL-F	27.5 TNL-F	27.5 RL	27.5 TNL	27.5 MLC
29"x2.4" or 27.5"x2.8"			27.5"x2.6" or 26"x3.0"			29"x2.6"							27.5"x2.4"						
Air Cartridge						Air Cartridge													
TNL		MLC	TNL		MLC	TNL-R		TNL-F		TNL		MLC	TNL-R		TNL-F		TNL		MLC
Lock-Out		Mechanic-Lock-Out	Lock-Out		Mechanic-Lock-Out	Rebound adjust Lock-Out		Lock-Out Fixed Rebound		Lock-Out		Mechanic-Lock-Out	Rebound adjust Lock-Out		Lock-Out Fixed Rebound		Lock-Out		Mechanic-Lock-Out
V	-	-	V	-	-	V	-	V	-	V	-	-	V	-	V	-	V	-	-
1.5" Aluminum tapered 28.6mm Aluminum																			
140mm						130mm													
32mm Steel																			
QPQ Black																			
Magnesium																			
9*110mm Open Dropout						15*100mm Bolt Axle 9*100mm Open Dropout													
-																			
mudguard						mudguard/long fender													
80, 100, 120mm																			
51mm			43mm			51mm							43mm						
490 / 510 / 530mm			27.5": 475 / 495 / 515mm 26": 460 / 480 / 500mm			495 / 515 / 535mm							485 / 505 / 525mm						
Post-Mount Disc (160 - 220mm max.)																			
Taiwan			Taiwan			Taiwan							Taiwan						

BIKE CATEGORY	XC														
Model	ALPHA														
	110-15 RA	110-15 RL	110-15 TNL	110-15 MLC	110-15 T	110-9 29 / 27.5+ RA	110-9 29 / 27.5+ RL	110-9 29 / 27.5+ TNL	110-9 29 / 27.5+ MLC	110-9 29 / 27.5+ T	110-9 27.5 / 26 RA	110-9 27.5 / 26 RL	110-9 27.5 / 26 TNL	110-9 27.5 / 26 MLC	110-9 27.5 / 26 T
Max Tire (w/o fender)	29"x2.6" or 27.5"x2.8"					29"x2.4" or 27.5"x2.8"					27.5"x2.6" or 26"x3.0"				
Spring	Coil (Preload Adjust)														
Damper	RA	TNL		MLC	-	RA	TNL		MLC	-	RA	TNL		MLC	-
	Rebound adjust	Lock-Out		Mechanic-Lock-Out	-	Rebound adjust	Lock-Out		Mechanic-Lock-Out	-	Rebound adjust	Lock-Out		Mechanic-Lock-Out	-
Lock-Out Remote	-	V	-	-	-	-	V	-	-	-	-	V	-	-	-
Steerer	1.5" Steel tapered 28.6mm Steel														
Crown	140mm														
Stanchion	32mm Steel														
	CP Finish														
Lower	Magnesium														
	15*110mm Bolt Axle					9*110mm Open Dropout									
Lamp Mount	-														
Fender Mount	mudguard/long fender					mudguard									
Travel	80, 100, 120, 130, 135mm					80, 100, 120, 130, 140mm					80, 100, 120, 130, 140mm				
Fork Offset	51mm					51mm					43mm				
Fork Height	500 / 520 / 540 / 550 / 555mm					490 / 510 / 530 / 540 / 550mm					27.5": 475 / 495 / 515 / 525 / 535mm 26": 460 / 480 / 500 / 510 / 520mm				
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)														
Origin of Production	China					China					China				

RST SPECIFICATION

XC											
OMEGA											
29 RL	29 TNL	29 MLC	29 T	27.5 RL	27.5 TNL	27.5 MLC	27.5 T	26 RL	26 TNL	26 MLC	26 T
29"x2.6"				27.5"x2.4"				26"x2.4"			
Coil (Preload Adjust)											
TNL		MLC	-	TNL		MLC	-	TNL		MLC	-
Lock-Out		Mechanic-Lock-Out	-	Lock-Out		Mechanic-Lock-Out	-	Lock-Out		Mechanic-Lock-Out	-
V	-	-	-	V	-	-	-	V	-	-	-
1.5" Steel tapered 28.6mm Steel											
130mm											
32mm Steel											
CP Finish											
Magnesium											
15*100mm Bolt Axle 9*100mm Open Dropout											
-											
mudguard/long fender											
80, 100, 120mm											
51mm				43mm				38mm			
495 / 515 / 535mm				485 / 505 / 525mm				460 / 480 / 500mm			
Post-Mount Disc (160 - 220mm max.)											
China				China				China			

BIKE CATEGORY	XC											DIRT JUMP		
Model	BLAZE								GILA			SPACE		SLOPE
	29 RL	29 TNL	29 MLC	29 T	27.5 RL	27.5 TNL	27.5 MLC	27.5 T	29 RL	29 TNL	29 MLC	Jump	Free	HC
Max Tire (w/o fender)	29"x2.6"				27.5"x2.6"				29"x2.4"			26"x2.4"		27.5"x2.4" or 26"x2.4"
Spring	Coil (Preload Adjust)								Coil (Preload Adjust)			Air3	Coil	Air3
Damper	TNL		MLC	-	TNL		MLC	-	TNL		MLC	RA		OCR+
	Lock-Out		Mechanic-Lock-Out	-	Lock-Out		Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	Rebound adjust		Compress adjust Rebound adjust
Lock-Out Remote	V	-	-	-	V	-	-	-	V	-	-	-	-	-
Steerer	1.5" Steel tapered 28.6mm Steel				28.6mm Steel				28.6mm Steel			1.5" Aluminum tapered 28.6mm Aluminum	28.6mm Cr-mo steel	1.5" Aluminum tapered 28.6mm Aluminum
Crown	130mm								130mm			138mm		130mm
Stanchion	32mm Steel				30mm Steel				28.6mm Steel			36mm Aluminum	36mm Steel	34mm Aluminum
	CP Finish								CP Finish			Hard Anodize Black	QPQ Black	Hard Anodize Black
Lower	Aluminum								Aluminum			Magnesium		Magnesium
	15*100mm Bolt Axle 9*100mm Open Dropout								9*100mm Open Dropout			20*110mm Bolt Axle 15*100mm Bolt Axle		15*100mm QR Axle
Lamp Mount	FLI				-				-			-	-	-
Fender Mount	mudguard/long fender				mudguard				mudguard/long fender			mudguard		mudguard
Travel	80, 100, 120mm								80, 100, 120mm			80, 100mm		80, 100, 130mm
Fork Offset	51mm				44mm				51mm			43mm		43mm
Fork Height	500 / 520 / 540mm				475 / 495 / 515mm				490 / 510 / 530mm			465 / 485mm		27.5": 475 / 495 / 525mm 26": 470 / 490 / 520mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)								Post-Mount Disc (160 - 220mm max.)			Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (180 - 220mm max.)
Origin of Production	China				China				China			Taiwan		Taiwan

RST SPECIFICATION

DIRT JUMP			TREKKING							
DIRT			PULSE							
RA	R	T	29 Air-RL	29 Air-TNL	29 RL	29 TNL	27.5 Air RL	27.5 Air TNL	27.5 RL	27.5 TNL
26"x2.2"			29"x2.8"				27.5"x2.6"			
Coil (Preload Adjust)		Dual Coil (Preload Adjust)	Air Cartridge		Coil (Preload Adjust)		Air Cartridge		Coil (Preload Adjust)	
RA	R	-	TNL							
Rebound adjust	Fixed Rebound	-	Lock-Out				Lock-Out			
-	-	-	V	-	V	-	V	-	V	-
28.6mm Cr-Mo Steel			1.5" Aluminum tapered 28.6mm Aluminum							
130mm			130mm							
32mm Steel			32mm Steel				30mm Steel			
CP Finish			QPQ black							
Aluminum			Aluminum							
15*100mm Bolt Axle 9*100mm Open Dropout			15*100mm Bolt Axle 9*100mm Open Dropout							
-			FLI				-			
mudguard			mudguard/long fender				mudguard			
RA / T : 80, 100, 130mm R: 80, 100 mm			50, 60, 80, 100, 120mm				60, 80, 100mm			
38mm			51mm				43mm			
460 / 480 / 510mm			470 / 480 / 500 / 520 / 540mm				455 / 475 / 495mm			
Post-Mount Disc (160 - 220mm max.) Disc+V-Brake			Post-Mount Disc (160 - 220mm max.)							
China			Taiwan							

BIKE CATEGORY	TREKKING									
Model	VOLTA		VOGUE E		VOLAIR E		VIVAIR E		VOGUE	
	AIR TRL	AIR	AIR TRL	AIR	RL	TNL	RL	TNL	AIR TRL	AIR
Max Tire (w/o fender)	700x55C		700x55C		700x55C		700x55C		700x50C	
Spring	Air Cartridge		Air Cartridge		Air Cartridge		Air Cartridge		Air	
Damper	BO-TNL		OCR		TNL-F		TNL		OCR	
	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Lock-Out Fixed Rebound	Lock-Out Fixed Rebound	Lock-Out	Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out
Lock-Out Remote	V	-	V	-	V	-	V	-	V	-
Steerer	1.5" Aluminum tapered 28.6mm Aluminum"		1.5" Aluminum tapered		1.5" Aluminum tapered 28.6mm Aluminum		1.5" Aluminum tapered 28.6mm Steel		1.5" Aluminum tapered 28.6mm Aluminum	
Crown	130mm		130mm		130mm		130mm		120 mm	
Stanchion	32mm Aluminum		30mm Aluminum		32mm Steel		30mm Steel		28.6mm Aluminum	
	Hard Anodize Black		Hard Anodize Black		QPQ Black		QPQ Black		Hard Anodize Black	
Lower	Aluminum		Aluminum		Aluminum		Aluminum		Magnesium	
	15*100mm Bolt Axle 9*100mm Open Dropout		15*100mm Bolt Axle 9*100mm Open Dropout		15*100mm Bolt Axle 9*100mm Open Dropout		15*100mm Bolt Axle 9*100mm Open Dropout		9*100mm Open Dropout	
Lamp Mount	FLI		PLS		FLI		PLS		PLS	
Fender Mount	mudguard/long fender		mudguard/long fender		mudguard/long fender		mudguard/long fender		mudguard/long fender	
Travel	50, 60, 80mm		50, 60, 80mm		50, 60, 80mm		50, 60, 80mm		50, 60, 80mm	
Fork Offset	44mm		44mm		44mm		44mm		44mm	
Fork Height	460 / 470 / 490mm		460 / 470 / 490mm		460 / 470 / 490mm		460 / 470 / 490mm		460 / 470 / 490mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		Post-Mount Disc (160 - 220mm max.)		Post-Mount Disc (160 - 220mm max.)		Post-Mount Disc (160 - 220mm max.)		Post-Mount Disc (160 - 180mm max.) Disc+V-Brake	
Origin of Production	Taiwan		Taiwan		Taiwan		Taiwan		Taiwan	

RST SPECIFICATION

TREKKING

VIVAIR		VITA				AVALON				VOLAR			
RL	TNL	RL	TNL	MLC	T	27.5 RL	27.5 TNL	27.5 MLC	27.5 T	RL	TNL	MLC	T
700x50C		700x50C				27.5"x2.2" & 26"x2.4"				700x55C			
Air Cartridge		Coil (Preload Adjust)				Coil (Preload Adjust)				Coil (Preload Adjust)			
TNL		TNL		MLC	-	TNL		MLC	-	TNL-F		MLC	-
Lock-Out	Lock-Out	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-
V	-	V	-	-	-	V	-	-	-	V	-	-	-
1.5" Aluminum tapered 28.6mm Aluminum		1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel			
120mm		120mm				130mm				130mm			
28.6mm Steel		28.6mm Steel				30mm Steel				32mm Steel			
QPQ Black		CP Finish				CP Finish				CP Finish			
Magnesium		Magnesium				Aluminum				Aluminum			
9"100mm Open Dropout		9"100mm Open Dropout				15"100mm Bolt Axle 9"100mm Open Dropout				15"100mm Bolt Axle 9"100mm Open Dropout			
PLS		PLS				PLS				FLI			
mudguard/long fender		mudguard/long fender				mudguard/long fender				mudguard/long fender			
50, 60, 80mm		50, 60, 80mm				50, 60, 80mm				50, 60, 80mm			
44mm		44mm				38mm				44mm			
460 / 470 / 490mm		460 / 470 / 490mm				440 / 450 / 470mm				460 / 470 / 490mm			
Post-Mount Disc (160 - 220mm max.) Disc+V-Brake		Post-Mount Disc (160 - 220mm max.) Disc+V-Brake				Post-Mount Disc (160 - 220mm max.)				Post-Mount Disc (160 - 220mm max.)			
Taiwan		China				China				China			

BIKE CATEGORY

TREKKING

Model	VOLANT				NOVA				NEON PLS				VERSE			
	RL	TNL	MLC	T	RL	TNL	MLC	T	RL	TNL	MLC	T	RL	TNL	MLC	T
Max Tire (w/o fender)	700x55C				700x50C				700x50C				700x50C			
Spring	Coil (Preload Adjust)				Coil (Preload Adjust)				Coil (Preload Adjust)				Coil (Preload Adjust)			
Damper	TNL		MLC	-	TNL		MLC	-	TNL		MLC	-	TNL		MLC	-
	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-
Lock-Out Remote	V	-	-	-	V	-	-	-	V	-	-	-	V	-	-	-
Steerer	1.5" Steel tapered 28.6mm Steel				28.6mm Steel				28.6mm Steel				28.6 / 25.4mm Steel			
Crown	130mm				112mm				112mm				112mm			
Stanchion	30mm Steel				28.6mm Steel				28.6mm Steel				28.6mm Steel			
	CP Finish				CP Finish				CP Finish				CP Finish			
Lower	Aluminum				Aluminum				Aluminum				Aluminum			
	15*100mm Bolt Axle 9*100mm Open Dropout				9*100mm Open Dropout				9*100mm Open Dropout				9*100mm Open Dropout			
Lamp Mount	PLS				PLS				PLS				-			
Fender Mount	mudguard/long fender				mudguard/long fender				mudguard/long fender				mudguard/long fender			
Travel	50, 60, 80mm				50, 60mm				50, 60mm				40, 50mm			
Fork Offset	44mm				44mm				44mm				44mm			
Fork Height	460 / 470 / 490mm				466 / 476mm				466 / 476mm				450 / 460mm			
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)				Post-Mount Disc (160 - 220mm max.) Disc+V-Brake				Post-Mount Disc (160 - 220mm max.) Disc+V-Brake				V-Brake			
Origin of Production	China				China				China				China			

RST SPECIFICATION

TREKKING				CARGO					
ANGEL				GARY	PORTER	BEAST			
26 RL	26 TNL	26 MLC	26 T	20 T	20 T	20 R	20 T	24 R	24 T
26"x2.2"				20"x2.6"	20"x2.4"	20"x2.6"		24"x2.6"	
Coil (Preload Adjust)				Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Coil (Preload Adjust)	Dual Coil (Preload Adjust)
TNL		MLC	-	-	-	R	-	R	-
Lock-Out	Lock-Out	Mechanic-Lock-Out	-	-	-	Fixed Rebound	-	Fixed Rebound	-
V	-	-	-	-	-	-	-	-	-
28.6mm Steel				28.6mm Steel	28.6mm Cr-Mo Steel	1.5" Cr-Mo Steel tapered		1.5" Cr-Mo Steel tapered	
112mm				125mm	125mm	145mm		135mm	
28.6mm Steel				28.6mm Steel	30mm Steel	36mm Steel			
CP Finish				CP Finish	CP Finish	CP Finsh			
Magnesium				Aluminum	Magnesium	Aluminum			
9*100mm Open Dropout				9*100mm Open Dropout	15*100mm Bolt Axle 9*100mm Open Dropout	15*110mm Bolt Axle		15*100mm Bolt Axle	
-				-	-	FLI			
mudguard/long fender				mudguard	mudguard/long fender	mudguard/long fender			
60, 75mm				50mm	40 ,60, 80mm	50, 60, 70mm		50, 60, 70mm	
43mm				38mm	38mm	43mm		43mm	
450 / 460mm				373mm	363 / 383 / 403mm	370 / 380 / 390mm		414 / 424 / 434mm	
IS-Mount Disc (140 - 160mm max.) Disc+V-Brake				IS-Mount Disc (140 - 160mm max.) Disc+V-Brake	Post-Mount Disc (160 - 220mm max.)	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.)	
China				China	China	China		China	

BIKE CATEGORY														FAT BIKE											E-MOTO									
Model	GUIDE										RENEGADE			SIGMA			GUIDE DC																	
	26 AIR-TNL	26 AIR-MLC	26 TNL	26 MLC	26 T	20 AIR-TNL	20 AIR-MLC	20 TNL	20 MLC	20 T	26 AIR-TRL	26 AIR	26 TNL	27.5 AIR	27.5 COIL	20 AIR	26 AIR-TNL	26 TNL	20 AIR-TNL	20 TNL	20 T													
Max Tire (w/o fender)	26"x4.6"					20"x4.6"					26"x4.0"			27.5"x2.4"		20"x4.0"		26"x4.6"		20"x4.6"														
Spring	Air Cartridge		Coil (Preload Adjust)			Air Cartridge		Coil (Preload Adjust)			Air3		Coil (Preload Adjust)	Air Cartridge	Coil	Air Cartridge	Air Cartridge	Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)														
Damper	TNL	MLC	TNL	MLC	-	TNL	MLC	TNL	MLC	-	BO-TNL		TNL	OCR+		HCR	TNL	TNL	TNL	TNL	-													
	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust	Compress adjust Rebound adjust	Lock-Out	Lock-Out	Lock-Out	Lock-Out	-													
Lock-Out Remote	-	-	-	-	-	-	-	-	-	-	V	-	-	-	-	-	-	-	-	-	-													
Steerer	1.5" Steel tapered 28.6mm Steel										1.5" Aluminum tapered 28.6mm Aluminum		1.5" Steel tapered	28.6mm Aluminum		28.6mm Aluminum		28.6mm Steel																
Crown	180mm										190mm			151mm-Dual		171mm-Dual		180mm																
Stanchion	32mm Steel										32mm Aluminum		32mm Steel	38mm Aluminum		36mm Aluminum		32mm Steel																
	CP Finish										Hard Anodize Black		CP Finish	Hard Anodize Black		Hard Anodize Black		CP Finish																
Lower	Aluminum										Magnesium			Aluminum		Aluminum		Aluminum																
	15*135mm Bolt Axle 9*135mm Open Dropout										15*150mm QR Axle			20*110mm Bolt Axle		15*135mm Bolt Axle		15*135mm Bolt Axle 9*135mm Open Dropout																
Lamp Mount	-					-					-			-		-		-		-														
Fender Mount	mudguard					mudguard/long fender					mudguard/long fender			mudguard		mudguard		mudguard		mudguard/long fender														
Travel	75, 95, 120mm					45, 60mm					80, 100, 120mm			200mm		150mm		80, 100, 120mm		50, 60, 80mm														
Fork Offset	50mm										51mm			45mm		40mm		56mm																
Fork Height	515 / 535 / 560mm					410 / 425mm					500 / 520 / 540mm			591mm		482mm		520 / 540 / 560mm		490 / 500 / 520mm														
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)										Post-Mount Disc (160 - 220mm max.)			Post-Mount Disc 220mm max.		Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (160 - 220mm max.)																
Origin of Production	China					China					Taiwan			China		China		China		China														

RST SPECIFICATION

Bike Category		SINGLE SHOCK			
Model	SS 3.0	SS-A8	SS-A7-T	SS-A7	PILOT
Max Tire (w/o fender)	700 x 50C	700 x 50C	700 x 50C	700 x 50C	700 x 47C
Feature	Alu.Blade Changeable spring	Alu.Blade Changeable spring	Alu.Blade Spring preload	Alu.Blade	Alu.Blade
Spring	coil with bumper	coil with bumper	coil with bumper	coil with bumper	coil with bumper
Steerer	1.5"Aluminum tapered steerer module (210mm length min)	28.6mm Aluminum (Optional1.5" Aluminum tapered steerer) (210mm length min)	28.6mm Aluminum (Optional1.5" Aluminum tapered steerer) (210mm length min)	28.6mm Aluminum (Optional1.5" Aluminum tapered steerer) (210mm length min)	1.5" Aluminum tapered steerer (210mm length min)
Lower	Customized	Aluminum	Aluminum	Aluminum	Aluminum
		9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout
Lamp Mount	-	-	-	-	-
Fender Mount	Customized	mudguard/long fender	mudguard/long fender	mudguard/long fender	mudguard/long fender
Travel	35mm	35mm	30mm	35mm	40mm
Fork Offset	Customized	43mm	43mm	43mm	45mm
Fork Height	Customized	475mm	480mm	475mm	495mm
Brake Type / Rotor Size	Customized	Disc only or Disc+V-Brake (optional Roller Mount) (160-180mm max.)	Disc only or Disc+V-Brake (optional Roller Mount) (160-180mm max.)	Disc only or Disc+V-Brake (optional Roller Mount) (160-180mm max.)	Disc only (optional Roller Mount) (160-180mm max.)
Origin of Production	Taiwan	Taiwan	Taiwan	Taiwan	China

AUSTRIA

Thalinger Lange GmbH

🌐 thalinger-lange.com
 ☎ +43-7242-4970
 ✉ mail@thalinger-lange.com

CZECH

Universe Agency Spol. S.R.O

🌐 cz.author.eu
 ☎ +420-244-990-777
 ✉ info@author.cz

GREECE

Nikos Maniatopoulos S.A.

🌐 idealbikes.net
 ☎ +30-2610-993045
 📠 +30-2610-990424
 ✉ info@idealbikes.net

SLOVAK REP.

Universe Slovakia S.R.O.

☎ +421-326-521-902
 ✉ author@author.sk

BENELUX

Buzaglo B.V.

🌐 buzaglo.nl
 ☎ +31-36-521-0100
 ✉ info@buzaglo.nl

FRANCE

RST-Paul Lange France SARL

🌐 paul-lange.fr
 ☎ +33 388 93 - 2101
 ✉ info@paul-lange.fr

ITALY

GB CENTER

☎ +39 0423 040109
 ✉ assistenza@gb-center.it

SWITZERLAND

Fuchs-movesa AG

🌐 fuchs-movesa.ch
 ☎ +41-56-464-46-46
 ✉ info@fuchs-movesa.ch

BULGARIA

Nikol Bike Center Ltd.

🌐 bikecenter.bg
 ☎ +359-89-5460025
 ✉ giono.gionov@bikecenter.bg

GERMANY

Paul Lange & Co.

🌐 paul-lange.de
 ☎ +49-711-258802
 ✉ info@paul-lange.de

POLAND

Velo Sp. Z. O. O.

🌐 velo.pl
 ☎ +48-32-330-67-00
 ✉ informacja@velo.com.pl

RST GLOBAL PARTNERS

non **EU**

ARGENTINA

Nexina S.A

🌐 nexina.com.ar
☎ +54 9 1131375170
✉ jcuenca@nexina.com.ar

CHILE

Andes Industrial Ltda.

🌐 andesindustrial.cl
☎ +56-2-2650-3100
📠 +56-2-719-1136
✉ andes@andesindustrial.cl

ISRAEL

RANOFUN

🌐 ranofun.co.il
☎ +972-4-952-2334
📠 +972-4-560-0212
✉ ranofun@gmail.com

RUSSIA

Arves Market Ltd.

🌐 arvesmarket.ru
☎ +7-499-153-0721
📠 +7-495-991-6888
✉ arvesmarket@yandex.ru

BRAZIL

GRUPO JOGÁ

🌐 www.grupojoga.com.br
☎ (16) 3384-8200
📠 (16) 99633-9375
✉ comercial@grupojoga.com.br

CHINA

Suzhou Dawei Precision Co., Ltd.

🌐 rstuspension.com
☎ +86-512-8616-0698
📠 +86-512-8616-0100
✉ sales2@rst-topway.cn

PHILIPPINES

Comet Cycle Center

🌐 cometcycle.com
☎ +63-2-8372-5590
📠 +63-2-372-5590
✉ comet@cometcycle.com

TAIWAN

RST Greenergy Technology Co. Ltd.

🌐 rstuspension.com
☎ +886-2-8521-2351
📠 +886-2-8521-6159
✉ rst@rst.com.tw

CENTER AMERICA

Distribuidora Ochenta Y Seis S.A.

🌐 d86group.com
☎ +506-4035-2000
✉ info@d86group.com

COLOMBIA

Len Importaciones Ltda.

🌐 lenimp.com
☎ +57-76712222
✉ erika.suarez@lenimp.com

RUSSIA

Maximum Ltd.

🌐 st-peterbike.ru
☎ +7-812-740-79-62
✉ maximum@msgbox.ru

U.S.A.

Risse Racing Technology, Inc

🌐 risseracing.com
☎ +1-541-526-7242
✉ sales@risseracing.com

www.rstsuspension.com

HEAD QUARTER

RST
TAIWAN

RST GREENERGY TECH. CO., LTD.

TEL : +886.2.85212351

Email : rst@rst.com.tw

RST
EUROPE

RST EUROPE OFFICE

TEL : +49.711.2588255

Email : info@rst-europe.eu

RST
CHINA

SUZHOUN DAWEI PRECISION CO., LTD.

TEL : +86.512.86160698

Email : sales2@rst-topway.cn

