2027
CATALOGUE

SPONSORSHIP

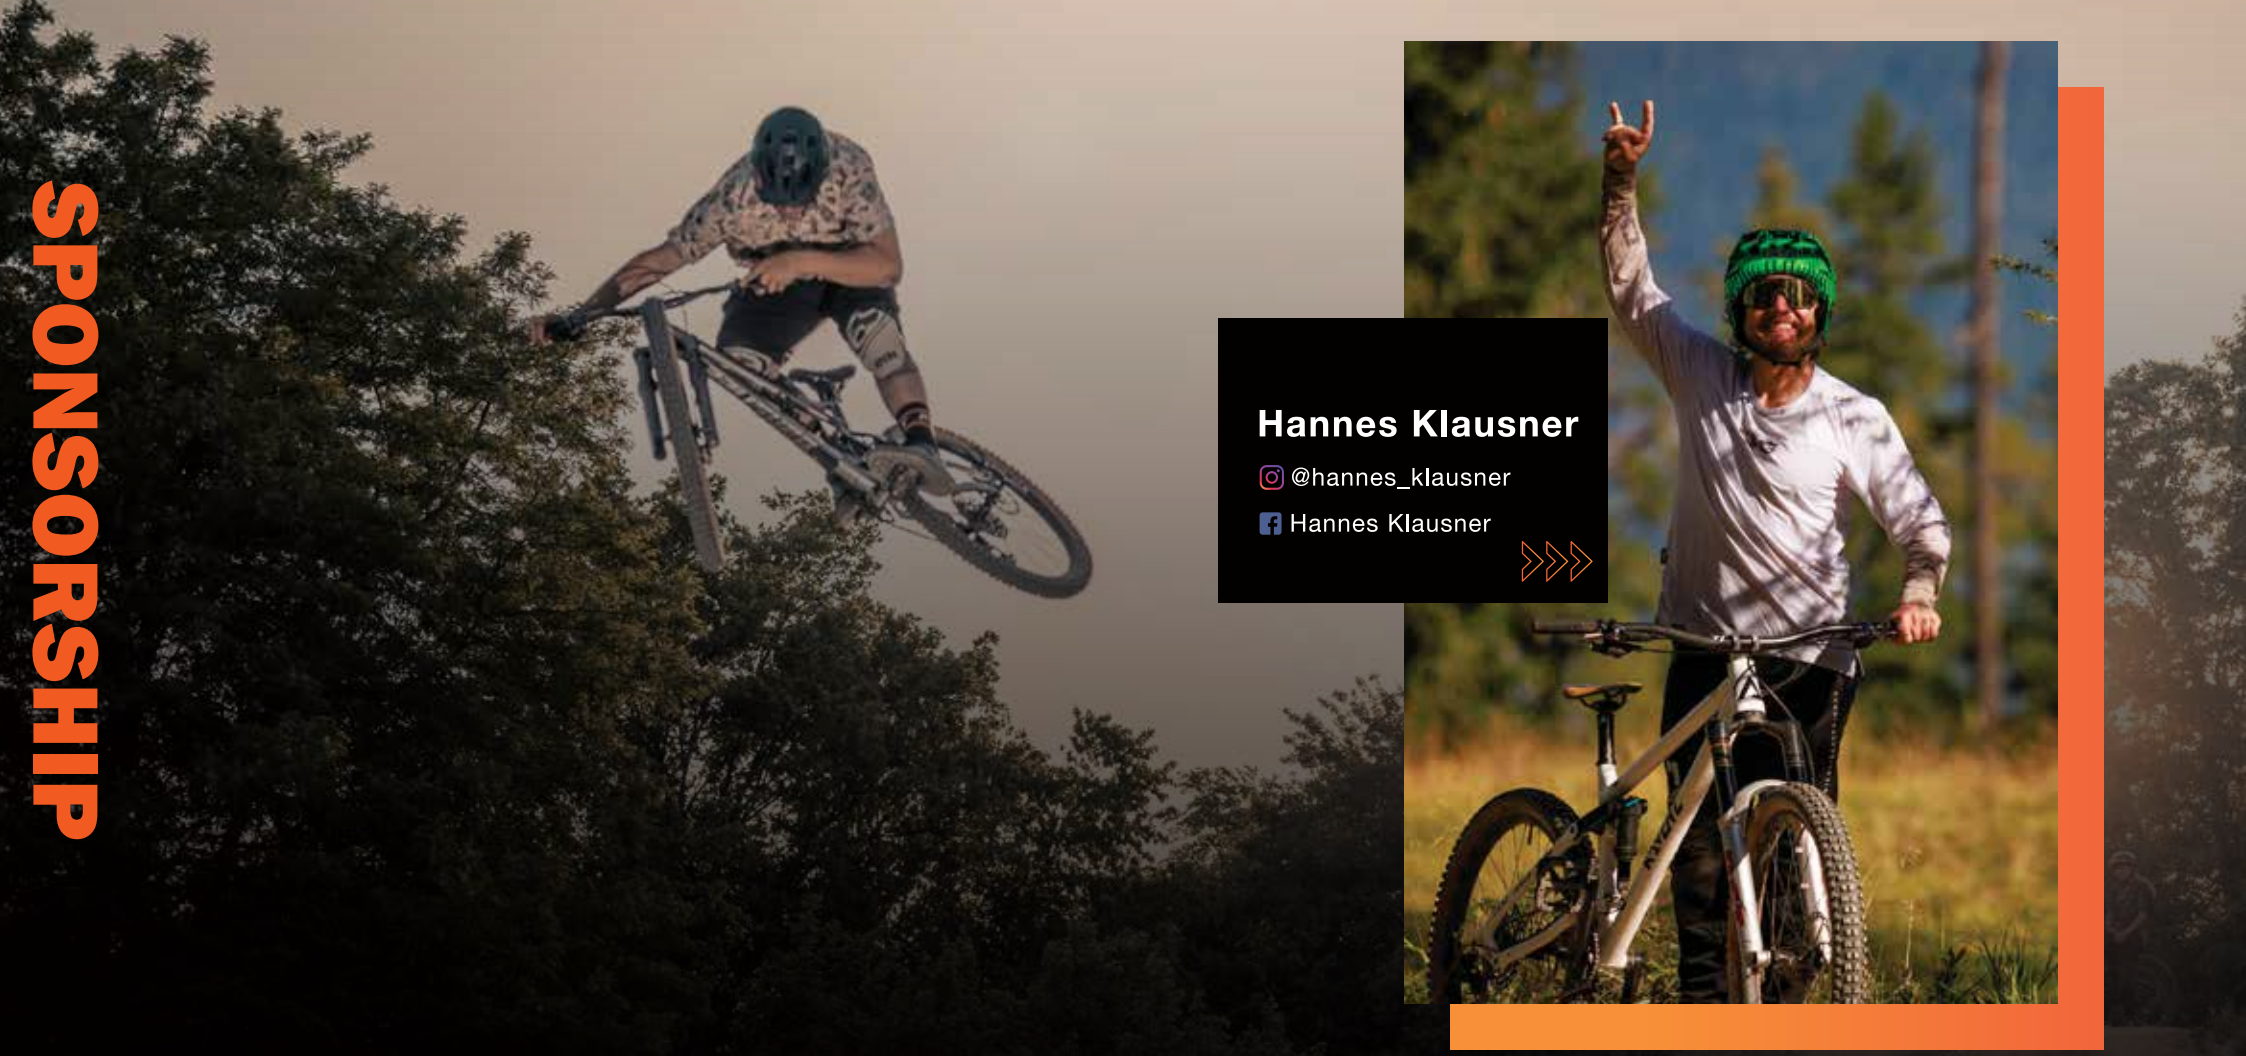

Hannes Klausner
@hannes_klausner
Hannes Klausner

Lukas Reiner
@luxbiketv

Richard Fert
@richardfert

Elvin Hepp
@eh_enduro

Daniel Plenk
@daniel_plenk

Sven Hermann
@svenherrmann_

Shang-Mou Yu
@ymh6106
@airtime_indoor_bike_park

Joao Mendes
@joaomendes95

Elof Lind
@eloflindh

Dewayne Taylor
@therealfourtyfour

Josh Hult
@joshhult

Gustaw Dadela
@gustawdadela

Alexandre Valls
@alexandre.valls

Taha Ghabeli
@tahaghabeli1

Jakub Vencl
- @jakubvencl
- Jakub Vencl
- Jakub Vencl

Jason Connor
- @jaseconnor14

Brayden Barret-Hay
- @braydenbarretthay
- Brayden Barrett/Hay
- Brayden Barrett/Hay

Greg Watts
- @gregwatts1987
- Greg Watts

Fred Austruy
- @fredaustruy
- Fred Austruy
- Fred Austruy MTB Fan Page

TECHNOLOGY

OCR2+

Brand new HiFlo (TM) damper design with IFP upgrade.

Overall improved performance in hard riding conditions.

Stable damping performance over a longer time period.

OCR Platform

Low Speed Compression control with high speed compression shim stack.

BO TNL

Blow-off damping system
Low Speed Compression with Lockout, blow off shim stack and rebound adjustment.

HCR

Hydraulic Compression with Rebound
Low Speed Compression Control with rebound adjustment

ABS

Compatible to the 2nd generation BOSCH ABS system.

Tiny Remote Lockout

Smart Remote Lockout with complete new compact design . The shifter position can be adjusted vertically or horizontally with one bolt! No need to worry about any interference.

Remote Lock-out

This feature is available on any model featuring Compression/Lock-out adjustments. The remote has aluminium levers and a barrel adjuster on the cable to fine-tune your set up.

Lock-out

Hydraulic damping cartridge system with compression adjustment to lockout function.

Lock-out with Rebound

Hydraulic damping cartridge with lockout and rebound adjustment.

Lock-out with Fixed-rebound

Hydraulic damping cartridge with lockout and non-adjustable rebound

Fixed Rebound

Hydraulic damping cartridge with non-adjustable Low speed rebound

Rebound Adjustment

A hydraulic adjustable cartridge that lets you externally set the forks rebound.

Mechanical Lock-out Cartridge

Mechanical lock-out system(not hydraulic)

CABLE ROUTING

Fork available with cable routing solution for a hub dynamo cable.

Spring Pre-load

An adjustable top cap that lets a rider adjust the pre-load of the spring depending on rider weight and desired feel.

Post Lighting System

Front lamp holder integrated into the fork arch with two fixing bolts. Maintains the clean look of the fork arch with a plastic protection cover when the front lamp is not used.

CONTENTS

REAR SHOCK

MONO 11
MONO/MEZZO 12

E-MTB
DH/ ENDURO

R.EVO 29 14
STITCH 29 16
ROGUE V2 18
VIBE V2
REBEL V2 20
BLADE PRO 22
BLADE 23
KILLAH 24
STITCH
STORM

DROPPER

ELEV8 E 25
ELEV8 H
ELEV8 A2 26
LEVEL

JUNIOR

F1RST 28
AERIAL 29

E-MTB
XC

F1RST 32
AERIAL 33
OMEGA 34
BLAZE 35

DIRT JUMP

SPACE 37
SLOPE/SNYPER 38
SHINE/DIRT 39

E-CITY TREKKING

NEW VOYAGE 41
AVION 42
PULSE
VOLTA 43
FLI & PLS
VOLAIR E 44
VOLAR
NEW VOGUE E 45
NEW VIVAIR E
NEW VOLANT 46
AVALON

GRAVEL

SINGLE SHOCK 47
STEM SHOCK

CARGO

BEAST 48
PORTER

FAT

RENEGADE 49
GUIDE 50

E-MOTO

GUIDE DC 51
GAIA
SIGMA 52
MEZZO

ACCESSORIES 53
DAMPER CARTRIDGE 57
AIR2 CARTRIDGE 61
COIL SPRING LIST 62
DIMENSIONS 63
SPECIFICATIONS 65
GLOBAL PARTNERS 81

COLOR OPTIONS

DK-8010 ***MATT BLACK***
(YS-727)

DK-8011 ***SHINY BLACK***
(YS-728)

TAIPEI CYCLE
d&i awards 2025
by iF

E TACK

RSTSUSPENSION.COM

An electronic, adaptive damping control represents the pinnacle of our damper developments. And we have come a far way since our first presentations of a wireless damper control back in 2010.

Sensor reading and App adjustability lets you focus on your ride rather than on the damper adjustment. Welcome to the future.

iF DESIGN AWARD 2024

Smart TAG PLATFORM

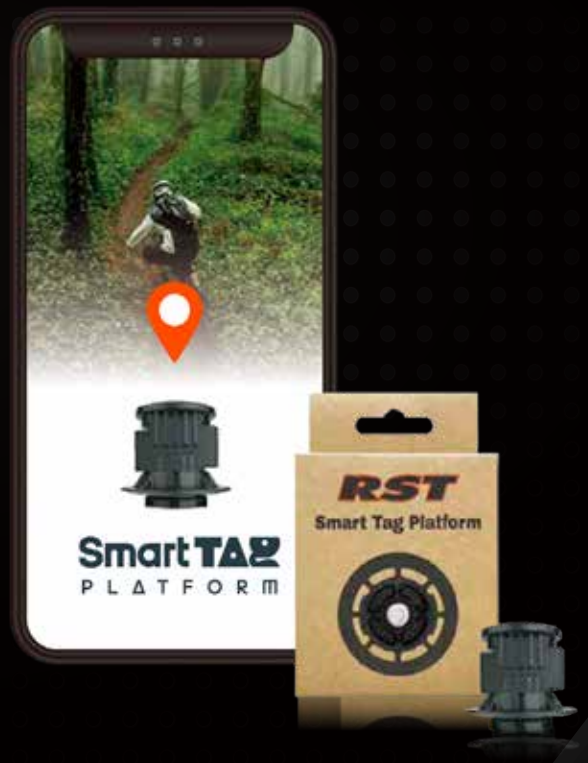

Gravel

Integrated inverted suspension for E-Gravel bikes with built-in mudguard and adjustable air spring.

E-TACK electronic damping via CAN Bus enables automatic, battery-free damping adjustment.

Lightweight linkage seatpost provides superior comfort while maintaining pedaling efficiency.

E-TACK

RSTSUSPENSION.COM

E-TACK is compatible with All Mountain, Gravel,

and Fatbike suspension forks,

using AI to detect terrain and control damping automatically

upgrading existing forks with no manual adjustment.

ALL Mountain

FAT Bike

Gravel Bike

MONO

TRUNNION DPU/R

SIZE
145 * 30mm
145 * 35mm
165 * 40mm
165 * 45mm
185 * 50mm
185 * 55mm
205 * 60mm
205 * 65mm

MONO

STANDARD DPU/R

SIZE
170 * 30mm
170 * 35mm
190 * 40mm
190 * 45mm
210 * 50mm
210 * 55mm
230 * 60mm
230 * 65mm

MEZZO

STANDARD DPU

SIZE
265 * 85mm
210 * 55mm
190 * 50mm

R.EVO 29

The by far most lightweight 29er DH fork RST has ever been creating. 38mm chassis with 110x20mm Boost axle is giving you maximum control. Combined with top notch damper & air spring design, the R.EVO is the perfect match for the toughest lines on the planet.

Rider:Hannes Klausner
Photo by:Rene Deutschländer

R.EVO 29

MODEL	29 AIR	29 COIL
Max Tire	29"x2.8"	
Spring	Air3	Coil
Damper	OCR2+	
	Compress adjust Rebound adjust	
Steerer	28.6mm Aluminum	
Stanchion	38mm	
	Hard Anodize Black Aluminum	
Lower	Magnesium	
	20*110 mm Bolt Axle (Boost)	
Lamp Mount	-	
Fender Mount	mudguard/long fender	
Travel	200mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	

STITCH 29

The ultimate 38mm stanchion, 29er trail tool with some tricks up its sleeves when it comes to the most
advanced builds currently possible. Shredding harsh lines or ending in long travel SUV builds supporting ABS mounts, this fork got you all covered.

Rider:Sven Hermann
Photographer:Mike Hunger

STITCH 29

MODEL	29 AIR	29 COIL
Max Tire	29"x2.8"	
Spring	Air3	Coil
Damper	OCR2+	
	Compress adjust Rebound adjust	
Steerer	1.5" Aluminum tapered	
Stanchion	38mm	
	Hard Anodize Black	
Lower	Magnesium	
	15*110 mm Bolt Axle 20*110 mm Bolt Axle (Boost)	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	160, 170, 180mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	

3D 29" 38 mm 110×15 110×20 ABS E-BIKE READY

ROGUE V2

The latest 29er trail development is the Swiss army knife of trail forks. Light, stiff 36mm Boost chassis with all current features to build up potent trail, up to SUV bikes.
IFP High-Flo ™ damper cartridge, vent ports, BOSCH ABS ™, long fender mount up to F.L.I. – we got you covered. We created nothing less than the future all-star RST highlight.

Rider:Elvin Hepp

ROGUE V2

MODEL	29 Air	29 Air w/o Lockout
Max Tire	29"x2.6"	
Spring	Air3	
Damper	OCR2+	
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum Tapered	
Stanchion	36mm	
	Hard Anodize Black	
Lower	Magnesium	
	15*110 mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	140, 150, 160mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	

*Remote Lockout available

VIBE V2

MODEL	29 AIR-RA	29 AIR-TNL	29 RA	29 TNL
Max Tire	29"x2.6"			
Spring	Air Cartridge		Coil (Preload Adjust)	
Damper	Rebound adjust	Lock-Out	Rebound adjust	Lock-Out
Steerer	1.5" Steel tapered			
Stanchion	36mm Steel			
	QPQ Black			
Lower	Magnesium			
	15*110 mm Bolt Axle			
Lamp Mount	FLI			
Fender Mount	mudguard/long fender			
Travel	120, 130, 140mm			
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)			

*Remote Lockout available

3D E.TACK 29" 36 mm 110×15 ABS E-BIKE READY

3D 29" 36 mm 110×15 ABS E-BIKE READY

REBEL V2

Supreme inverted 29er trail fork that definitely stands out among its rivals. Swappable axle system makes it easy to adjust the outstanding comfort that comes with the inverted built. Stanchion guards support the moto optics, we love that fork.

Rider *Lukas Reiner*

REBEL V2

MODEL	AIR	AIR w/o Lockout
Max Tire	29"x2.4" or 27.5"x3.0"	
Spring	Air	
Damper	OCR+	
	Compress adjust Lock-Out Rebound adjust	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered	
Stanchion	32mm Aluminum	
	Hard Anodize Black	
Lower	Magnesium	
	20*110 mm Bolt Axle (boost) 15*110 mm Bolt Axle	
Lamp Mount	-	
Fender Mount	mudguard	
Travel	80, 100, 130, 140, 150mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	

*Remote Lockout available

E-TACK

3D

29" 27.5" 32 mm 110×20 110×15 E-BIKE READY

BLADE PRO

Upcoming trail star. Featuring 35mm stanchions for a fine balance in between stiffness and weight. This fork will take some beating on trail adventures around the globe. Reliable, well balanced air spring and damper systems support you with comfort on all your rides, all year long. Available in 15x110mm Boost for your 29er or even 27.5 ED / AM bike or Ebike builts.

Rider *Hannes Klausner*
Photo by *Christoph Breiner*

BLADE PRO

MODEL	110-15 AIR	110-15 AIR w/o Lockout
Max Tire	29"x2.8" or 27.5"x2.8"	
Spring	Air3	
Damper	BO-TNL	HCR
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered	
Stanchion	35mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*110mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	29": 130, 140, 150mm 27.5": 100, 120, 140mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	

*Remote Lockout available

E-TACK

BLADE

MODEL	110-15 AIR-TNL-F	110-15 AIR-TNL-R	110-15 TNL-F	110-15 TNL-R
Max Tire	29"x2.8" or 27.5"x2.8"			
Spring	Air Cartridge		Coil (Preload Adjust)	
Damper	Lock-Out Fixed Rebound	Lock-Out Rebound adjust	Lock-Out Fixed Rebound	Lock-Out Rebound adjust
Steerer	1.5" Steel tapered			
Stanchion	34mm Steel			
	QPQ Black			
Lower	Aluminum			
	15*110mm Bolt Axle			
Lamp Mount	FLI			
Fender Mount	mudguard/long fender			
Travel	29": 90,100,110,120, 130, 140mm, (Air: 150mm) 27.5": 100, 120, 140mm			
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)			

*Remote Lockout available

KILLAH

MODEL	27.5 / 26 AIR	27.5 / 26 COIL
Max Tire	27.5"x2.4" or 26"x2.4"	
Spring	Air Cartridge	Coil
Damper	OCRC+	
	Compress adjust Rebound adjust	
Steerer	28.6mm Aluminum	
Stanchion	36mm	
	Hard Anodize Black	
Lower	Magnesium	
	20*110 mm Bolt Axle (Boost)	
Lamp Mount	-	
Fender Mount	mudguard	
Travel	200mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	

STITCH

MODEL	27.5 / 26 AIR	27.5 / 26 COIL	STORM 27.5 / 26 RA
Max Tire	27.5"x2.4" or 26"x2.4"		
Spring	Air3	Coil	Coil
Damper	OCR2+/ OCRC+		Rebound adjust
	Compress adjust Rebound adjust		
Steerer	1.5" Aluminum tapered 28.6mm Aluminum		1.5" Aluminum tapered 28.6mm Cr-Mo Steel
Stanchion	36mm		
	Hard Anodize Black Aluminum		QPQ Black Steel
Lower	20*110mm QR Axle (Non-Boost)		
Lamp Mount	-		
Fender Mount	mudguard		
Travel	160, 170, 180mm		
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)		

ELEV8 A2

Model	A2	A2-0
Function	Air Height Adjustment	
Travel·	80, 100, 125, 150, 170mm	
Feature	Internal Cable Routing Remote Operated 10mm Setback	Internal Cable Routing Remote Operated
	30.9 / 31.6mm	30.9 / 31.6 / 34.9mm
Length	322mm (80mm travel) 362mm (100mm travel) 412mm (125mm travel) 462mm (150mm travel) 497mm (170mm travel)	412mm (125mm travel) 462mm (150mm travel) 497mm (170mm travel)

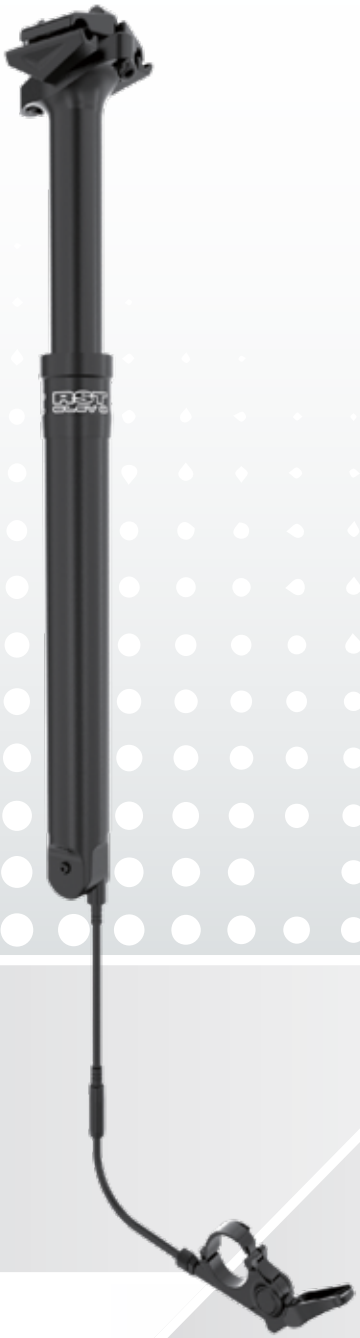

ELEV8 H

Model	H-S	H
Function	Hydraulic Height Adjustment	
Travel	100, 125, 150mm	
Feature	Internal Cable Routing Remote Operated	External Cable Routing Remote Operated
	30.9 / 31.6mm	
Length	365mm (100mm travel) 414mm (125mm travel) 439mm (150mm travel)	

LEVEL

Model	T
Function	Spring Adjustment
Travel	20mm
Feature	27.2 / 30.9 / 31.6mm
Length	360mm (20mm travel)

JUNIOR

hand in hand with a new generation of riders, RST has been refining the product lineup covering everything from XC to AM in order to offer something that those kids can go shredding with.Our approach for the junior category: nothing less than the best value for the money spent. What we are getting in return? Big smiles of the juniors coming back from their rides.

Rider: Jack Buck

F1RST

MODEL	26 AIR	24 AIR	20 AIR	16 AIR
Max Tire	26"x2.4"	24"x2.6"	20"x2.4"	16"x2.2"
Spring	Air3	Air		
Damper	BO-TNL			
	Compress adjust Rebound adjust Lock-Out			
Steerer	1.5" Aluminum tapered 28.6mm Aluminum			28.6mm Aluminum
Stanchion	32mm Aluminum			30mm Aluminum
	Hard Anodize Black			
Lower	Magnesium			
	15*100mm Bolt Axle 9*100mm Open Dropout			
Lamp Mount	-			
Fender Mount	mudguard/long fender			
Travel	100, 120, 130mm		60, 80, 100,120mm	50,60mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)			Post-Mount Disc (140 - 160mm max.) D+V-Brake

*Remote Lockout available

3D 26" 24" 20" 16" 32 mm 30 mm E-BIKE READY

AERIAL

MODEL	26 TNL-F	26 MLC	24 TNL-F	20 TNL-F	16 TNL-F
Max Tire	26"x2.4"		24"x2.6"	20"x2.4"	16"x2.2"
Spring	Air Cartridge				
Damper	Lock-Out Fixed Rebound	Mechanic-Lock-Out	Lock-Out Fixed Rebound	Lock-Out Fixed Rebound	Lock-Out Fixed Rebound
Steerer	1.5" Aluminum tapered 28.6mm Aluminum				28.6mm Aluminum
Stanchion	32mm Steel				30mm Steel
	QPQ Black				
Lower	Magnesium				
	15*100mm Bolt Axle 9*100mm Open Dropout				
Lamp Mount	-				
Fender Mount	mudguard/long fender				
Travel	100, 120, 130 mm			60, 80, 100, 120 mm	50,60mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)				Post-Mount Disc (140 - 160mm max.) D+V-Brake

*Remote Lockout available

3D 26" 24" 20" 16" 32 mm 30 mm E-BIKE READY

XC

Lightweight and efficient suspension from 80mm to 140mm distinguish the XC and touring lineups.
Forks with a perfectly balanced mixture of comfort, performance and trail control ready for enjoying your local trail network to competing in the toughest race events.

Rider Rih-Nan Junior High School MTB

F1RST

MODEL	110-15 AIR	110-9 29 / 27.5+ AIR	110-9 27.5 / 26 AIR
Max Tire	29"x2.6" or 27.5"x2.8"	29"x2.4" or 27.5"x2.8"	27.5"x2.6" or 26"x3.0"
Spring	Air3		
Damper	BO-TNL	OCR	
	Compress adjust Rebound adjust Lock-Out		
Steerer	1.5" Aluminum tapered 28.6mm Aluminum		
Stanchion	32mm Aluminum		
	Hard Anodize Black		
Lower	Magnesium		
	15*110mm Bolt Axle	9*110mm Open Dropout	
Lamp Mount	-		
Fender Mount	mudguard/long fender	mudguard	
Travel	80, 100, 120mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Non boost available
*Remote Lockout available

E-TACK

AERIAL

MODEL	110-15 TNL	110-15 MLC	110-9 29 / 27.5+ TNL	110-9 29 / 27.5+ MLC	110-9 27.5 / 26 TNL	110-9 27.5 / 26 MLC
Max Tire	29"x2.6" or 27.5"x2.8"		29"x2.4" or 27.5"x2.8"		27.5"x2.6" or 26"x3.0"	
Spring	Air Cartridge					
Damper	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum					
Stanchion	32mm Steel					
	QPQ Black					
Lower	Magnesium					
	15*110mm Bolt Axle		9*110mm Open Dropout			
Lamp Mount	-					
Fender Mount	mudguard/long fender		mudguard			
Travel	80, 100, 120mm					
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)					

*Non boost available
*Remote Lockout available

OMEGA

MODEL	29 TNL	29 MLC	29 T	27.5 TNL	27.5 MLC	27.5 T	26 TNL	26 MLC	26 T
Max Tire	29"x2.6"			27.5"x2.4"			26"x2.4"		
Spring	Coil (Preload Adjust)								
Damper	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel								
Stanchion	32mm Steel						30mm Steel		
	CP Finish								
Lower	Magnesium								
	15*100mm Bolt Axle 9*100mm Open Dropout						9*100mm Open Dropout		
Lamp Mount	-								
Fender Mount	mudguard/long fender								
Travel	80, 100, 120mm								
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)								

*Remote Lockout available

BLAZE

MODEL	29 TNL	29 MLC	29 T	27.5 TNL	27.5 MLC	27.5 T
Max Tire	29"x2.6"			27.5"x2.6"		
Spring	Coil (Preload Adjust)					
Damper	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel					
Stanchion	32mm steel			30mm steel		
	CP Finish					
Lower	Aluminum					
	15*100mm Bolt Axle 9*100mm Open Dropout					
Lamp Mount	FLI					
Fender Mount	mudguard/long fender					
Travel	80, 100, 120mm					
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)					

*Remote Lockout available

DIRT JUMP

The fork series for DIRT riders – Increased durability and ready for air time.
Tough, short travel design combined with a top performing damping system make for forks ready to take on the toughest lines on the planet.

Rider *Sven Herrmann*
Photo by *Markus Frühmann*

SPACE

MODEL	JUMP	FREE
Max Tire	26"x2.4"	
Spring	Air3	Coil
Damper	RA	
	Rebound adjust	
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	28.6mm Cr-mo Steel
Stanchion	36mm Aluminum	36mm Steel
	Hard Anodize Black	QPQ Black
Lower	15*100mm Bolt Axle 20*110mm Bolt Axle (Non-Boost)	
Lamp Mount	-	-
Fender Mount	mudguard	
Travel	80, 100mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	

3D

26"

36 mm

E-BIKE READY

SLOPE

MODEL	HC
Max Tire	27.5"x2.4" or 26"x2.4"
Spring	Air3
Damper	OCRC+
	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered 28.6mm Aluminum
Stanchion	34mm Aluminum
	Hard Anodize Black
Lower	Magnesium
	15*100mm QR Axle
Lamp Mount	–
Fender Mount	mudguard
Travel	80, 100, 130mm
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)

3D 27.5" 26" 34 mm E-BIKE READY

SNYPER

MODEL	24 AIR
Max Tire	24"x2.2"
Spring	Air3
Damper	BO-TNL
	Compress adjust Lock-Out Rebound adjust
Steerer	1.5" Aluminum tapered 28.6mm Aluminum
Stanchion	32mm Aluminum
	Hard Anodize Black
Lower	Magnesium
	9*100mm Open Dropout
Lamp Mount	-
Fender Mount	mudguard/long fender
Travel	60, 70, 80, 100, 120mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)

3D 24" 32 mm E-BIKE READY

SHINE

MODEL	RA
Max Tire	26"x2.4"
Spring	Air Cartridge
Damper	Rebound adjust
Steerer	1.5" Steel tapered
Stanchion	34mm Steel
	QPQ Black
Lower	Magnesium
	15*100mm Bolt Axle
Lamp Mount	-
Fender Mount	mudguard
Travel	80, 100, 130mm
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)

3D

26" 34 mm E-BIKE READY

DIRT

MODEL	RA	R
Max Tire	26"x2.2"	
Spring	Coil (Preload Adjust)	
Damper	Rebound adjust	Fixed Rebound
Steerer	28.6mm Cr-Mo Steel	
Stanchion	32mm Steel	
	CP Finish	
Lower	Aluminum	
	15*100mm Bolt Axle	
Lamp Mount	-	
Fender Mount	mudguard	
Travel	RA : 80, 100, 130mm R: 80, 100 mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

3D

26" 32 mm E-BIKE READY

E-CITY / TREKKING

Comfortable forks for touring and city bikes with travel in between 50mm to 80mm.

Efficient suspension forks that include mounting options that allow use of integrated lights, fenders, dynamos and even roller brake use. Carefree technical systems allow convenient daily use.

***Rider** Stephan Guddat*
***Photo by** Jan Alwers*

NEW

VOYAGE

MODEL	AIR	COIL
Max Tire	700*60C or 29"x 2.6"	
Spring	Air Cartridge	Coil (Preload Adjust)
Damper	BO-TNL	TNL-F
	Compress adjust Lock-Out Rebound adjust	Lock-Out Fixed Rebound
Steerer	1.5" Aluminum tapered	
Stanchion	36mm Aluminum	36mm steel
	Hard Anodize Black	QPQ black
Lower	Magnesium	
	15*110mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	80, 100, 120mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	

*Remote Lockout available

3D

E-TACK

29" 700C 36 mm 110×15 ABS E-BIKE READY

AVION

MODEL	110-15 AIR	110-15 AIR w/o Lockout
Max Tire	29"x2.8"	
Spring	Air3	
Damper	BO-TNL	HCR
	Compress adjust Lock-Out Rebound adjust	Compress adjust Rebound adjust
Steerer	1.5" Aluminum tapered	
Stanchion	35mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*110mm Bolt Axle	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	100/120mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)	

*Remote Lockout available

PULSE

MODEL	29 AIR TNL	27.5 AIR TNL
Max Tire	29"x2.8"	27.5"x2.6"
Spring	Air Cartridge	
Damper	Lock-Out	
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	32mm steel	30mm steel
	QPQ black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80, 100mm	60, 80, 100mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)	

*Remote Lockout available

3D E.TACK 29" 35 mm 110×15 E-BIKE READY

3D 29" 27.5" 32 mm E-BIKE READY TRI-TEST EPAC TREKKING 2

VOLTA

MODEL	AIR TRL	AIR
Max Tire	700x55C	
Spring	Air Cartridge	
Damper	Remote Lock-Out Rebound adjust	Compress adjust Lock-Out Rebound adjust
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	32mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

3D

700C 32 mm E-BIKE READY

Light Mount Options

FLI

Front Light Integration

* Suitable for STITCH29,ROGUEV2, VIBE V2,BLADE PRO ,BLADE,AVION,BLAZE 29,VOYAGE,PULSE29,VOLTA,VOLAIR E, VOLAR, VOGUE E, VIV AIR E, VOLANT, BEAST.

PLS

Post Lighting System

*Suitable for AVALON.

VOLAIR E

MODEL	RL	TNL-F
Max Tire	700x55C	
Spring	Air Cartridge	
Damper	Remote Lock-Out Fixed Rebound	Lock-Out Fixed Rebound
Steerer	1.5" Aluminum tapered 28.6mm Aluminum	
Stanchion	32mm Steel	
	QPQ Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

VOLAR

MODEL	TNL	MLC	T
Max Tire	700x55C		
Spring	Coil (Preload Adjust)		
Damper	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	32mm Steel		
	CP Finish		
Lower	Aluminum		
	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	FLI		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available

3D 700C 32 mm E-BIKE READY

3D 700C 32 mm E-BIKE READY EFBE TRI-TEST EPIC TREKKING

NEW

VOGUE E

MODEL	AIR TRL	AIR
Max Tire	700x55C	
Spring	Air Cartridge	
Damper	TNL-R	
	Rebound adjust Remote Lock-Out	Compress adjust Rebound adjust Lock-Out
Steerer	1.5" Steel tapered 28.6mm Steel	
Stanchion	30mm Aluminum	
	Hard Anodize Black	
Lower	Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI	
Fender Mount	mudguard/long fender	
Travel	50, 60, 80,100mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

NEW

VIVAIR E

MODEL	RL-F	TNL-F	RL	TNL
Max Tire	700x55C			
Spring	Air Cartridge			
Damper	Fixed Rebound Remote Lock-Out	Fixed Rebound Lock-Out	Remote Lock- Out	Lock-Out
Steerer	1.5" Aluminum tapered 28.6mm Aluminum			
Stanchion	30mm Steel			
	QPQ Black			
Lower	Aluminum			
	15*100mm Bolt Axle 9*100mm Open Dropout			
Lamp Mount	FLI			
Fender Mount	mudguard/long fender			
Travel	50, 60, 80,100mm			
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)			

NEW

VOLANT

MODEL	TNL	MLC	T
Max Tire	700x55C		
Spring	Coil (Preload Adjust)		
Damper	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	30mm Steel		
	CP Finish		
Lower	Aluminum		
	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	FLI		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80,100mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available

AVALON

MODEL	27.5 TNL	27.5 MLC	27.5 T
Max Tire	27.5"x2.2" & 26"x2.4"		
Spring	Coil (Preload Adjust)		
Damper	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered 28.6mm Steel		
Stanchion	30mm Steel		
	CP Finish		
Lower	Aluminum		
	15*100mm Bolt Axle 9*100mm Open Dropout		
Lamp Mount	PLS		
Fender Mount	mudguard/long fender		
Travel	50, 60, 80mm		
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)		

*Remote Lockout available
*The only RST fork allowing the use of a front motor

3D 700C 30 mm E-BIKE READY TRI-TEST EPIC TREKKING 2

3D 27.5" 26" 30 mm E-BIKE READY TRI-TEST EPIC TREKKING 2

SINGLE SHOCK

MODEL	SS 3.0	SS-A8
Max Tire	700x50C	700x50C
Spring	coil with MCU	
Steerer	1.5" Aluminum tapered steerer module (210mm length min)	28.6mm Aluminum (Optional1.5" Aluminum tapered steerer) (210mm length min)
Lower	Customized	Alu. Blade
		9mm open dropout
Travel	35mm	35mm

STEM SHOCK

MODEL	W/ Lockout	W/O Lockout
Adjustable Angle	+4° / 0° / -4°	
Travel	20mm	
Lock-Out	V	-
	Fit into inner diameter ≥ 24.5mm steerer	
Length	Suspension system will add 35mm of height to the steerer tube	

3D

700C

E-BIKE READY

3D

TAIPEI CYCLE d&i awards 2021 by iF

BEAST

MODEL	24 R	24 T	20 R	20 T
Max Tire	24"x2.6"		20"x2.6"	
Spring	Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Coil (Preload Adjust)	Dual Coil (Preload Adjust)
Damper	Fixed Rebound	-	Fixed Rebound	-
Steerer	1.5" Cr-Mo Steel tapered			
Stanchion	36mm Steel			
	CP Finsh			
Lower	Aluminum			
	15*100mm Bolt Axle		15*110mm Bolt Axle	
Lamp Mount	FLI			
Fender Mount	mudguard/long fender			
Travel	50, 60,70mm		50, 60, 70mm	
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready	

PORTER

MODEL	20 T
Max Tire	20"x2.4"
Spring	Dual Coil (Preload Adjust)
Damper	-
Steerer	28.6mm Cr-Mo Steel
Stanchion	30mm Steel
	CP Finish
Lower	Magnesium
	15*100mm Bolt Axle
Lamp Mount	-
Fender Mount	mudguard/long fender
Travel	40 ,60, 80mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)

RENEGADE

MODEL	26 AIR	26 TNL
Max Tire	26"x4.0"	
Spring	Air3	Coil (Preload Adjust)
Damper	BO-TNL Compress adjust Lock-Out Rebound adjust	Lock-Out
Steerer	1.5"Aluminum tapered 28.6mm Aluminum	1.5" Steel tapered
Stanchion	32mm Aluminum	32mm Steel
	Hard Anodize Black	CP Finish
Lower	Magnesium	
	15*150mm QR Axle	
Lamp Mount	-	
Fender Mount	mudguard/long fender	
Travel	80, 100, 120mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)	

*Remote Lockout available

GUIDE

MODEL	26 AIR-TNL	26 ML	26 TNL	26 T	26 AIR-TNL	26 AIR-MLC	26 TNL	26 MLC	26 T	20 AIR-TNL	20 AIR-MLC	20 TNL	20 MLC	20 T
Max Tire	26"x4.6"				26"x4.6"					20"x4.6"				
Spring	Air Cartridge	Coil (Preload Adjust)			Air Cartridge		Coil (Preload Adjust)			Air Cartridge		Coil (Preload Adjust)		
Damper	Lock-Out	Mechanic-Lock-Out	Lock-Out	-	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-
Steerer	1.5" Steel tapered				1.5" Steel tapered 28.6mm Steel									
Stanchion	34mm Steel				32mm Steel									
	QPQ Black				CP Finish									
Lower	Aluminum				Aluminum									
	15*135mm Bolt Axle 9*135mm Open Dropout				15*135mm Bolt Axle 9*135mm Open Dropout									
Lamp Mount	-		-	-	-					-				
Fender Mount	mudguard				mudguard					mudguard/long fender				
Travel	75, 95, 120mm				75, 95, 120mm					45, 60mm				
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)				Post-Mount Disc (160 - 220mm max.)									

*Remote Lockout available

3D

26" 20" 34 mm 32 mm E-BIKE READY

GUIDE DC

MODEL	26 AIR-TNL	26 TNL	20 AIR-TNL	20 TNL	20 T	20 TNL
Max Tire	26"x4.6"		20"x4.6"			20"x4.6"
Spring	Air Cartridge	Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)		Coil (Preload Adjust)
Damper	Lock-Out				-	Lock-Out
Steerer	28.6mm Steel					28.6mm Steel
Stanchion	32mm Steel					36mm Steel
	CP Finish					QPQ Black
Lower	Aluminum					
	15*135mm Bolt Axle 9*135mm Open Dropout					
Lamp Mount	-					
Fender Mount	mudguard		mudguard/long fender			mudguard
Travel	80, 100, 120mm		50, 60, 80mm			60, 80mm
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)					

GAIA

MODEL	20 T
Max Tire	20"x4.0"
Spring	Air Cartridge
Damper	Lock-Out
Steerer	28.6mm Steel
Stanchion	30mm / 32mm Steel
	CP Finish
Lower	Aluminum
	10.5*135mm Open Dropout
Lamp Mount	-
Fender Mount	mudguard
Travel	80mm
Brake Type / Rotor Size	Post-Mount Disc (180mm)"

3D

26" 20" 36 mm 32 mm E-BIKE READY

20" 32 mm 30 mm E-BIKE READY

SIGMA

MODEL	27.5 AIR	27.5 COIL	20 AIR
Max Tire	27.5"x2.4"		20"x4.0"
Spring	Air Cartridge	Coil	Air Cartridge
Damper	OCR+		HCR
	Compress adjust Rebound adjust		
Steerer	28.6mm Aluminum		
Stanchion	38mm Aluminum		36mm Aluminum
	Hard Anodize Black		
Lower	Aluminum		
	20*110mm Bolt Axle		15*135mm Bolt Axle
Lamp Mount	-		
Fender Mount	mudguard		
Travel	200mm		150mm
Brake Type / Rotor Size	Post-Mount Disc 220mm max.		Post-Mount Disc (180 - 220mm max.)

MEZZO

MODEL	COIL
Eye to Eye x Travel	265x85, 210x55, 190x50
Function	Preload adjust Compress adjust Rebound adjust
Spring	350lb/400lb/450lb/500lb/550lb
Ride style	AM/FR/DH/E-MOTO
Color	Black

3D

27.5" 20" 38 mm 36 mm 110×20 135×15 E-BIKE READY

3D

RST FORK SEAL KITS

Only use genuine RST seals to keep your fork performing at its peak.
Seals keep the dust out and the grease in.
Sponge with oil can make fork compression smoothly.
SAG ring can help to measure SAG value easily.
The seal kits need to be replaced when worn.

MODEL	PART NO.	Fitments Available For
Seal kits for 38mm	#H5GBHJCJC01-KT	KILLAH 29, STITCH 29, R.EVO 29
Seal kits for 36mm	#H5FXY-2611-000-KT	KILLAH 27.5/26, STITCH 27.5/26, STORM, SPACE, BEAST 20/24
Seal kits for 36mm	#H5GBH25CFC0-AM	ROGUE V2, VIBE V2, VOYAGE
Seal kits for 35mm	#H5GBHPCKC1-KT	BLADE PRO, AVION
Seal kits for 34mm	#H5GBHECKC1-KT	SLOPE,BLADE
Seal kits for 32mm	#H5GBH8CEC1-KT	SNYPER, RENEGADE, F1RST series AERIAL 20/24/26 SLOPE,SHINE

O-RING KIT

MODEL	PART NO.
O-ring kit for 38mm	
O-ring kit for 36mm	
O-ring kit for 34mm	H5GORHGMC0-AM
O-ring kit for 32mm	H5GORHGEC0-AM
O-ring kit for 30mm	
O-ring kit for 28.6mm	

SPRING SEALS

MODEL	PART NO.	Fitments Available For
Seal for 32mm	#H5GBH8CEC1	AERIAL 110-15,
Seal for 32mm	#H5GBHBAEC1	AERIAL 27.5/29/110-9, OMEGA 29/27.5, DIRT, PULSE 29, BLAZE 29, VOLAR, VOLAIR E, VOLTA GUIDE
Seal for 30mm	#H5GBHCCCC1-1	PORTER
Seal for 30mm	#H5GBH8CDC2	OMEGA 26, BLAZE 27.5, PULSE 27.5, VOLANT, VIVAIR E, VOGUE E,VIVO

O-RING KIT REAR SHOCK

MODEL	PART NO.
MONO (Metric/Trunnion)	H5GBHQCKC1-1-AM
MONO (Imperial)	H5GBHQCKC1-2-AM

HIGH PRESSURE AIR PUMP

MODEL	PART NO.	Fitments Available For
High Pressure Air Pump	H5PFGP-2200-300	ALL RST Air forks

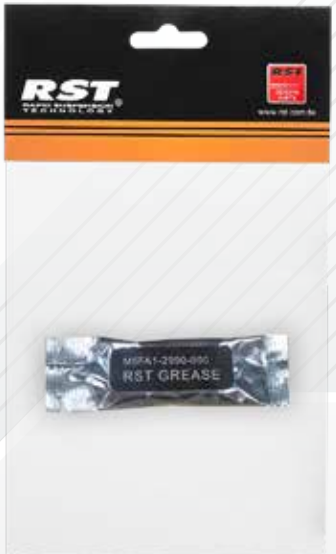

RST SPECIAL WRENCH

MODEL	PART NO.	Fitments Available For
RST wrench For preload adjusters	H5GAC616	All models with preload adjust & mechnical lockout function

GREASE

MODEL	PART NO.	Fitments Available For
Lubrication Kit 8g	M5FA1-2971-000	ALL RST FORK
Lubrication Kit 5g	H5FA1-2990-000	STEM SHOCK

CAPS

MODEL	PART NO.	Fitments Available For
Cap for 32mm	#H5GAEDMG29	OMEGA 29 T / 27.5 T, BLAZE 29T,VOLAR T
Cap for 30mm	#H5GAEDMG275	OMEGA 26 T, VOLANT T,BLAZE 27.5T

ADJUSTER (preload)

MODEL	PART NO.	Fitments Available For
Adjuster for 32mm	H5GAEAB29-1	DIRT
Adjuster for 32mm	H5GAE0A29-1	OMEGA 29/27.5, BLAZE 29
Adjuster for 30mm	H5GAE0A30-1	OMEGA 26
Adjuster for 30mm	H5FVP-2162-100-1	BLAZE 27.5, VOLANT

MOUNTING HARDWARE REAR SHOCK

OD=8mm	OD=10mm	OD=6mm
8X15mm	10X15mm	
8X16mm		
8X20mm	10X20mm	
8X22,2mm		6X22,2mm
8X25,4mm		6X25,4mm
8X30mm	10X30mm	
8X35mm		
8X40mm		
8X50mm		

* Fit all 15mm standard shock eye to eye and trunnion

RST Tools BOX

MODEL	PART NO.	Fitments Available For
RST Tools BOX	HXD9001-001	All RST Fork&Shocks

MUDGUARD

MODEL	PART NO.	Fitments Available For
Mudguard	HGACM-0316-0001	All RST Forks

OCR2+

MODEL	AM PACKAGE
ROGUE V2	H5GDPMBE04-11
STITCH 29	H5GDPMBE04-03
REVO 29	H5GDPMBE04-08

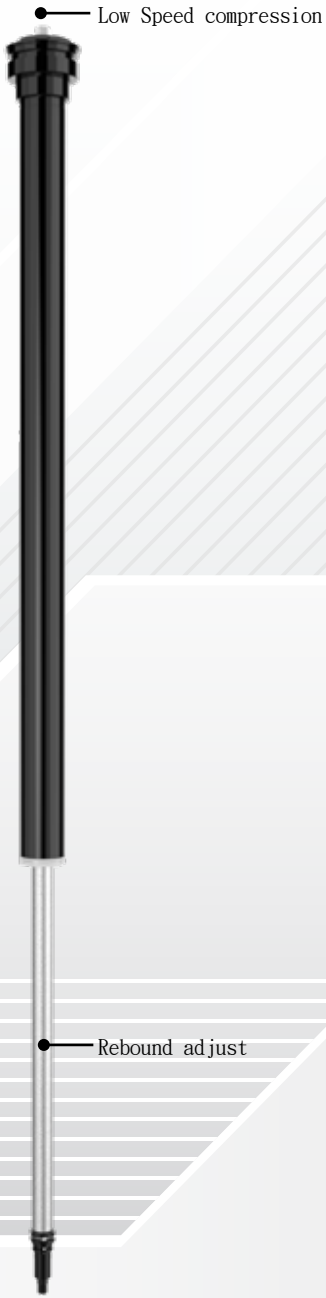

OCRC+

MODEL	AM PACKAGE
KILLAH	H5GDPEBE367-X
REBEL V2	H5GDPEBE372-X
STITCH 27.5/26	H5GDPEBE366-X
SLOPE	H5GDPEBE422-X

BO-TNL

MODEL	AM PACKAGE
F1RST 16	H5GDPQBE13-03
F1RST 20	H5GDPQBE13-02
F1RST 24	H5GDPLBE02-06
F1RST 26	H5GDPLBE02-04
F1RST 27.5	H5GDPLBE02-01
F1RST 29	H5GDPLBE02-01
110 F1RST	H5GDPLBE02-02
BLADE PRO 29	H5GDPLBE02-07
BLADE PRO 27.5	H5GDPLBE02-02
AVION	H5GDPLBE02-07
SNYPER	H5GDPLBE02-04
VOYAGE AIR	H5GDP25BE01-03
VOLTA	H5GDPQBE13-02
RENEGADE AIR	H5GDPLBE02-02

TNL-R

MODEL	AM PACKAGE
110 AERIAL	H5GDPLBE01-04
AERIAL 29	H5GDPLBE01-01
AERIAL 27.5	H5GDPLBE01-01
BLADE	H5GDPLBE01-04

TNL-F

MODEL	AM PACKAGE
110 AERIAL	H5GDPLBB02-03
AERIAL 29	H5GDPLBB02-02
AERIAL 27.5	H5GDPLBB02-02
BLADE	H5GDPLBB02-02
AERIAL 16	H5GDPRBB02-03
AERIAL 20	H5GDPLBB02-01
AERIAL 24	H5GDPLBB02-01
AERIAL 26	H5GDPLBB02-01
VOYAGE COIL	H5GDPLBB02-02
VOLAIR E	H5GDPLBB02-06
VIVAIR E	H5GDPLBB02-01

TNL

MODEL	AM PACKAGE
110 AERIAL	H5GDPCBE140-1
AERIAL 27.5	H5GDPFBK14
AERIAL 29	H5GDPFBK14
VIBE V2	H5GDPCBE140-1
OMEGA 29	H5GDPFBK14
OMEGA 27.5	H5GDPCBK140-1
BLAZE 29	H5GDPCBK140-1
BLAZE 27.5	H5GDPFBK140-1
VOLANT	H5GDPFBK10
AVALON	H5GDPFBK10
RENEGADE COIL	H5GDPCBK14-1

RA

MODEL	AM PACKAGE
SHINE	H5GDPNBD14-2
STORM	H5GDPNBD14-2
VIBE V2	H5GDPLBD180
SPACE	H5GDPNBD14-1

R

MODEL	AM PACKAGE
DIRT	H5GDPLBA01-02
BEAST	H5GDPLBA01-03

AIR2 CARTRIDGE

MODEL	TRAVEL	AIR CAP	FIXED GUIDE	AIR CARTRIDGE	EXTENSION ROD	AM PACKAGE
23' AERIAL 27.5	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06-02	M5GAENHA7097	H5GDP094-1-AM
	100				M5GAENHA7077	H5GDP094-2-AM
	80			H5GDPNDF06-21	M5GAENHA7152	H5GDP094-3-AM
23' AERIAL 29	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06-02	M5GAENHA7107	H5GDP091-1-AM
	100				M5GAENHA7087	H5GDP091-2-AM
	80			H5GDPNDF06-21	M5GAENHA7162	H5GDP091-3-AM
	60				M5GAENHA7142	H5GDP091-4-AM
22' AERIAL 110-15	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06-02	M5GAENHA7122	H5GDP251-1-AM
	100				M5GAENHA7102	H5GDP251-2-AM
	80			H5GDPNDF06-21	M5GAENHA7177	H5GDP251-3-AM
23' VIBE AIR 27.5-15	140	M5GAELBA13	M5GAENDAB343	H5GDPNDF06-03	M5GAENHA7112	H5GDP355-1-AM
	130				M5GAENHA7102	H5GDP355-2-AM
23' VIBE AIR 110-15	140	M5GAELBA13	M5GAENDAB343	H5GDPNDF06-03	M5GAENHA7127	H5GDP317-1-AM
	130				M5GAENHA7117	H5GDP317-2-AM
	120			H5GDPNDF06-02	M5GAENHA7122	H5GDP317-3-AM
	110				M5GAENHA7112	H5GDP317-4-AM
	100				M5GAENHA7102	H5GDP317-5-AM
	90				M5GAENHA7092	H5GDP317-6-AM
23' AERIAL 24	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06- 11	M5GAENHA7087	H5GDP102-1-AM
	100				M5GAENHA7067	H5GDP102-2-AM
	80			H5GDNPDF06- 21	M5GAENHA7102	H5GDP102-3-AM
	60				M5GAENHA7082	H5GDP102-4-AM
23' AERIAL 26	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06- 11	M5GAENHA7092	H5GDP092-1-AM
	100				M5GAENHA7072	H5GDP092-2-AM
	80			H5GDPNDF06- 21	M5GAENHA7107	H5GDP092-3-AM
	60				M5GAENHA7087	H5GDP092-4-AM

MODEL	TRAVEL	AIR CAP	FIXED GUIDE	AIR CARTRIDGE	EXTENSION ROD	AM PACKAGE
VOLAIR E	80	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06- 21	M5GAENHA7057	H5GDP502-1-AM
	60				M5GAENHA7037	H5GDP502-2-AM
	50				M5GAENHA7027	H5GDP502-3-AM
23' IGNITE 24	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06- 11	M5GAENHA7097	H5GDP169-1-AM
	100				M5GAENHA7077	H5GDP169-2-AM
	80			H5GDPNDF06- 21	M5GAENHA7112	H5GDP169-3-AM
	70				M5GAENHA7102	H5GDP169-4-AM
23' BLADE 110 29	150	M 5GAELBA13	M5GAEPDZ0320	H5GDPNDF06- 03	M5GAENHA7112	H5GDP051-1-AM
	140				M5GAENHA7102	H5GDP051-2-AM
	130				M5GAENHA7092	H5GDP051-3-AM
	120			H5GDPNDF06- 02	M5GAENHA7097	H5GDP051-4-AM
	110				M5GAENHA7087	H5GDP051-5-AM
	100				M5GAENHA7077	H5GDP051-6-AM
	90				M5GAENHA7067	H5GDP051-7-AM
24' GUIDE	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06-02	M5GAENHA7137	H5GDP296-1-AM
	95			H5GDPNDF06-21	M5GAENHA7207	H5GDP296-2-AM
	75				M5GAENHA7187	H5GDP296-3-AM
23' PULSE 29	120	M5GAELBA13	M5GAEPDB0290	H5GDPNDF06-11	M5GAENHA7132	H5GDP074-1-AM
	100				M5GAENHA7112	H5GDP074-2-AM
	80			H5GDPNDF06-21	M5GAENHA7142	H5GDP074-3-AM
	60				M5GAENHA7122	H5GDP074-4-AM
	50				M5GAENHA7112	H5GDP074-5-AM
23' PULSE 27.5	100	M5GAELBA13	M5GAENDAB305	H5GDPNDF06-02	M5GAENHA7052	H5GDP075-1-AM
	80			H5GDPNDF06-21	M5GAENHA7122	H5GDP075-2-AM
	60				M5GAENHA7102	H5GDP075-3-AM

MODEL	TRAVEL	AIR CAP	FIXED GUIDE	AIR CARTRIDGE	EXTENSION ROD	BUMPER	SPACER	WASHER	C-clip	AM PACKAGE
23' VIVAir E	80	M5GAELBA13	M5GAENDAB305	H5GDPNDF06-21	M5GAEQHA7127	M5GSPB-5006-2	N/A	M5FPX-2Y21-000	M5GAC8-001	H5GDP364-1-AM
	60				M5GAEQHA7107					H5GDP364-2-AM
	50				M5GAEQHA7097					H5GDP364-3-AM
23' VIVAir	80	M5GAELBA13	M5GAENDAB295	H5GDPNDF06-21	M5GAEQHA7132	M5GSPB-5006-2	M5FBN-2162-000	M5FPX-2Y21-000*2	M5GAC8-001	H5GDP041-1-AM
	60				M5GAEQHA7112					H5GDP041-2-AM
	50				M5GAEQHA7102					H5GDP041-3-AM

Coil Model Spring Guidelinesdelines

MODEL	Standard	Spring rate	Firm	Spring rate	Extra Firm	Spring rate
R.EVO 29	M5GSPH1370-059	0.59 kg/mm	M5GSPH1370-069	0.69 kg/mm	NONE	
KILLAH 27.5/26	M5GSPH1370-059	0.59 kg/mm	M5GSPH1370-069	0.69 kg/mm		
STITCH Series	M5GSPF1340-071	0.71 kg/mm	M5GSPF1340-078	0.788 kg/mm		
STORM 27.5/26	M5GSPF1340-071	0.71 kg/mm	M5GSPF1340-078	0.788 kg/mm		
BLADE 110	M5GSPN3311-117	1.17kg/mm	NONE			
VIBE 110	M5GSPG1285-132	1.32 kg/mm				
CAPA 24	MF2350-200-079	0.79 kg/mm	MF2350-200-117	1.17 kg/mm		
CAPA 20	MF2350-200-079	0.79 kg/mm	MF2350-200-117	1.17 kg/mm		
ALPHA 110	M5GSPG1285-110	1.1 kg/mm	M5GSPG1285-132	1.32 kg/mm		
OMEGA 29	M5GSPM3300-110	1.1 kg/mm	M5GSP91260-132	1.32 kg/mm		
OMEGA 27.5	M5GSPM3300-110	1.1 kg/mm	M5GSP91260-132	1.32 kg/mm		
OMEGA 26	M5GSP91260-110	1.1 kg/mm	M5GSP91260-132	1.32 kg/mm		
BLAZE 29	M5GSP91260-110	1.1 kg/mm	M5GSP91260-132	1.32 kg/mm		
BLAZE 27.5	M5GSP91240-120	1.2kg/mm	M5GSPG1240-132	1.32 kg/mm		
GILA29	M5GSPM3280-120	1.2 kg/mm	M5GSP91295-130	1.3 kg/mm		
SPACE JUMP	M5FVX-2350-000	0.88 kg/mm	M5FVX-2353-100	1.0 kg/mm	M5FVX-2355-138	1.38 kg/mm
SPACE FREE	M5FVX-2353-100	1.0 kg/mm	M5FVX-2355-138	1.38 kg/mm	NONE	
DIRT RA	M5GSP91260-110	1.1 kg/mm	M5GSP91260-132	1.32 kg/mm		
DIRT R	M5GSPL1275-128	1.34kg/mm	M5GSPL1275-128 M5GSPL1275-030	1.64kg/mm		
VOLAR	M5GSPP1225-140	1.4kg/mm	M5GSPP1225-160	1.6 kg/mm		
VOLANT	M5GSP91240-110	1.1 kg/mm	M5GSPG1240-132	1.38 kg/mm	M5GSP91215-250	2.5 kg/mm
AVALON	M5GSPG1240-132	1.38 kg/mm	M5GSP91215-250	2.5 kg/mm	NONE	
NOVA	MF2350-220-145	1.45 kg/mm	MF2350-220-165	1.65 kg/mm	MF2350-220-195	1.95 kg/mm
NEON PLS	MF2350-220-145	1.45 kg/mm	MF2350-220-165	1.65 kg/mm	MF2350-220-195	1.95 kg/mm
SS-A7/A8	M5GSPB1060-250	2.5 kg/mm	M5GSPC1060-300	3.0 kg/mm	NONE	
SS-A7 T	M5GSPB1055-250	2.5 kg/mm	M5GSPC1055-300	3.0 kg/mm		
STEM SHOCK	M5GSPH1399-5	2.1 kg/mm	M5GSPH1399-6	2.4 kg/mm		
BEAST T 20&24	M5GSPN4190-110-124	1.1&1.24kg/mm	M5GSPN4190-160-180	1.6&1.8kg/mm		
BEAST R 20&24	M5GSPN4190-160-180	1.6&1.8kg/mm	NONE			
PORTER	M5GSP91260-132	1.32 kg/mm	M5GSP91215-250	2.5 kg/mm		
RENEGADE	M5GSP91260-110	1.1 kg/mm	M5GSP91260-132	1.32 kg/mm		
SIGMA	M5GSPH1370-069	0.69 kg/mm	M5GSPH1370-089	0.89 kg/mm	M5GSPH1370-110	1.1 kg/mm
GUIDE DC 26	M5GSPG1285-132	1.32 kg/mm	M5GSPG1285-185	1.85 kg/mm	NONE	
GUIDE DC 20	M5GSP91260-132	1.32 kg/mm	M5GSPG1285-185	1.85 kg/mm		
GUIDE 26	M5GSPG1285-132	1.32 kg/mm	M5GSPG1285-185	1.85 kg/mm		
GUIDE 20	M5GSP91255-120	1.2kg/mm	M5GSP91260-132	1.32 kg/mm		

DIMENSIONS

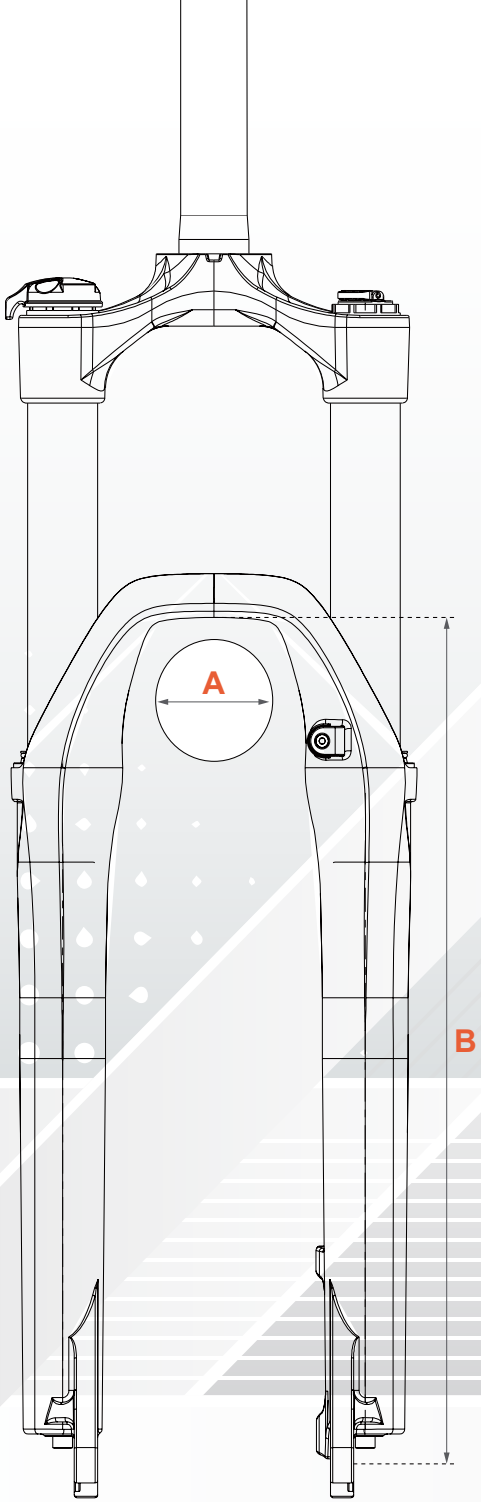

MODEL NAME	WIDTH A	FENDER MOUNT	HEIGHT B	MAXIMUM ROTOR SIZE
SIGMA 27.5	<63	-	-	220
REVO 29	<67	Yes	392	220
KILLAH 27.5&26	<63	-	365	220
STITCH 29	<67	Yes	392	220
STITCH 27.5&26	<63	-	365	220
STORM 27.5&26	<63	-	365	220
REBEL 29 / 27.5+	<76 for 27.5"+ ; <63 for 29"	-	-	220
ROGUE 110-15	<76 for 27.5"+ ; <58 for 29"	Yes	380	220
ROGUE 27.5&26	<63	-	365	220
TITAN 110-15	<76 for 27.5"+ ; <58 for 29"	Yes	380	220
TITAN 27.5& 26	<63	-	365	220
VIBE 110-15	<76 for 27.5"+ ; <58 for 29"	Yes	380	220
VIBE 27.5	<63	-	365	220
BLADE PRO	<67 for 29"	Yes	392	220
AVION	<67 for 29"	Yes	392	220
BLADE 110-15	<67 for 29"	Yes	392	220
REVEAL 110-15 29 / 27.5+	<73 for 27.5"+ ; <67 for 29"	Yes	390	220
REVEAL 29&29-15	<67	Yes	385	220
REVEAL 27.5&27.5-15	<63	Yes	376	220
FIRST 110-15 29 / 27.5+	<73 for 27.5"+ ; <67 for 29"	Yes	390	220
FIRST 110-9 29 / 27.5+	<73 for 27.5"+ ; <63 for 29"	Yes	378	220
FIRST 110-9 27.5 / 26	<67 for 27.5" ; <76 for 26"	Yes	365	220
F1RST 29&29-15	<67	Yes	385	220
F1RST 27.5&27.5-15	<63	Yes	376	220
F1RST 26&26-15	<67	Yes	350	180
AERIAL 110-15 29 / 27.5+	<73 for 27.5"+ ; <67 for 29"	Yes	390	220
AERIAL 110-9 29 / 27.5+	<73 for 27.5"+ ; <63 for 29"	Yes	378	220

MODEL NAME	WIDTH A	FENDER MOUNT	HEIGHT B	MAXIMUM ROTOR SIZE
AERIAL 110-9 27.5 / 26	<67 for 27.5" ; <76 for 26"	Yes	365	220
AERIAL 29&29-15	<67	Yes	385	220
AERIAL 27.5&27.5-15	<63	Yes	376	220
AERIAL 26&26-15	<67	Yes	350	180
ALPHA 110-15 29 / 27.5+	<73 for 27.5"+ ; <67 for 29"	Yes	390	220
ALPHA 110-9 29 / 27.5+	<73 for 27.5"+ ; <63 for 29"	Yes	378	220
ALPHA 110-9 27.5 / 26	<67 for 27.5" ; <76 for 26"	Yes	365	220
SPACE 26	<63	-	365	220
SLOPE 27.5&26	<63	-	365	220
SHINE 26	<63	-	365	220
DIRT 26	<56	-	350	220
OMEGA 29&29-15	<67	Yes	385	220
OMEGA 27.5&27.5-15	<63	Yes	376	220
OMEGA 26	<63	Yes	350	220
BLAZE 29&29-15	<67	Yes	390	220
BLAZE 27.5&27.5-15	<63	Yes	370	220
GILA 29	<63	Yes	380	220
ANGEL 26	<56	-	355	160
SNYPER 24	<56	Yes	317	180
IGNITE 24	<56	Yes	317	180
F1RST 24&24-15	<67	Yes	334	180
F1RST 20&20-15	<63	Yes	281	180
AERIAL 24&24-15	<67	Yes	334	180
AERIAL 20&20-15	<63	Yes	281	180
CAPA 24	<56	Yes	322	160
CAPA 20	<56	Yes	289	160
BEAST 24-15	<67	Yes	337	220

MODEL NAME	WIDTH A	FENDER MOUNT	HEIGHT B	MAXIMUM ROTOR SIZE
BEAST 20-15	<67	Yes	283	220
PORTER 20-15	<63	Yes	290	220
GARY 20	<67	Yes	289	160
PULSE 29&29-15	<67	Yes	390	220
PULSE 27.5&27.5-15	<63	Yes	370	220
VOLTA	<55	Yes	385	220
VOGUE E	<55	Yes	382	220
VOLAIR E	<55	Yes	385	220
VIVAir E	<55	Yes	382	220
VOGUE	<50	Yes	382	220
VIVAir	<55	Yes	382	220
VITA	<55	Yes	382	220
VOLAR	<55	Yes	385	220
VOLANT	<55	Yes	381	220
AVALON 27.5	<63	Yes	360	220
NEON PLS	<50	Yes	381	220
NOVA	<50	Yes	381	220
VERSE	<50	Yes	377	-
URBAN	<50	Yes	377	160
SS-A8	<55	Yes	382	180
SS-A7	<55	Yes	382	180
PILOT	<47	Yes	372	160
RENEGADE 26	<102	Yes	390	220
GUIDE 26	<117	Yes	410	220
GUIDE 20	<117	Yes	330	220

BIKE CATEGORY	DOWN HILL				ENDURO												
Model	R.EVO		KILLAH		STITCH				ROGUE V2			VIBE V2					
	29 AIR	29 COIL	27.5 / 26 AIR	27.5 / 26 COIL	29 AIR	29 COIL	27.5 / 26 AIR	27.5 / 26 COIL	29 AIR	29 AIR-TRL	29 AIR w/o Lockout	10-15 AIR-RA	110-15 AIR-RL	110-15 AIR-TNL	110-15 RA	110-15 RL	110-15 TNL
Max Tire (w/o fender)	29"x2.8"		27.5"x2.4" or 26"x2.4"		29"x2.8"		27.5"x2.4" or 26"x2.4"		29"x2.6" or 27.5"x3.0"			29"x2.6"					
Spring	Air3	Coil	Air Cartridge	Coil	Air3	Coil	Air3	Coil	Air3			Air Cartridge			Coil (Preload Adjust)		
Damper	OCR2+		OCRC+		OCR2+		OCR2+ / OCRC+		OCR2+			RA	TNL		RA	TNL	
	Compress adjust Rebound adjust		Compress adjust Rebound adjust		Compress adjust Rebound adjust				Compress adjust Rebound adjust Lock-Out		Compress adjust Rebound adjust	Rebound adjust	Lock-Out		Rebound adjust	Lock-Out	
Lock-Out Remote	-		-		-		-		-	V	-	-	V	-	-	V	-
Steerer	28.6mm Aluminum		28.6mm Aluminum		1.5" Aluminum tapered		1.5" Aluminum tapered 28.6mm Aluminum		1.5" Aluminum Tapered			1.5" Steel tapered					
Crown	145mm-Dual		138mm-Dual		145mm		138mm		140mm			150mm					
Stanchion	38mm Aluminum		36mm Aluminum		38mm Aluminum		36mm Aluminum		36mm Aluminum			36mm Steel					
	Hard Anodize Black		Hard Anodize Black		Hard Anodize Black				Hard Anodize Black Aluminum			QPQ Black					
Lower	Magnesium		Magnesium		Magnesium				Magnesium			Magnesium					
	20*110 mm Bolt Axle (Boost)		20*110mm Bolt Axle (Non-Boost)		15*110 mm Bolt Axle 20*110 mm Bolt Axle (Boost)		20*110mm QR Axle (Non-Boost)		15*110mm QR Axle			15*110mm QR Axle					
Lamp Mount	-		-		FLI		-		FLI			-FLI					
Fender Mount	mudguard/long fender		mudguard		mudguard/long fender		mudguard		mudguard			mudguard/long fender					
Travel	200mm		200mm		160, 170, 180mm		160, 170, 180mm		140,150,160mm			120, 130, 140mm					
Fork Offset	51mm		43mm		51mm		43mm		47mm			47mm					
Fork Height	610mm		27.5": 580mm 26": 565mm		580 / 590 / 600mm		27.5": 555 / 565 / 575mm 26": 540 / 550 / 560mm		578/568/558mm			510 / 530 / 540 / 550mm					
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready			Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready					
Origin of Production	Taiwan		Taiwan		Taiwan				Taiwan			China					

ENDURO							ENDURO							
STORM	REBEL V2			BLADE PRO			BLADE							
27.5/26 RA	AIR	AIR-TRL	AIR w/o Lockout	110-15 AIR	110-15 AIR-TRL	110-15 AIR w/o Lockout	110-15 AIR-TNL-F	110-15 AIR-RL	110-15 AIR-TNL-R	110-15 AIR-RL-R	110-15 TNL-F	110-15 RL	110-15 TNL-R	110-15 RL-R
27.5"x2.4" or 26"x2.4"	29"x2.4" or 27.5"x3.0"			29"x2.8" or 27.5"x2.8"			29"x2.8" or 27.5"x2.8"							
Coil	Air			Air3			Air Cartridge				Coil (Preload Adjust)			
RA	OCR+			BO-TNL		HCR	TNL-F		TNL-R		TNL-F		TNL-R	
Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust	Lock-Out Fixed Rebound		Rebound adjust Lock-Out		Lock-Out		Rebound adjust Lock-Out	
-	V		-	-	V	-	-	V	-	V	-	V	-	V
1.5" Aluminum tapered 28.6mm Cr-Mo Steel	1.5" Aluminum tapered			1.5" Aluminum tapered			1.5" Steel tapered							
138mm	140mm			140mm			140mm							
36mm Steel	32mm Aluminum			35mm Aluminum			34mm Steel							
QPQ Black	Hard Anodize Black			Hard Anodize Black			QPQ Black							
Magnesium	Magnesium			Aluminum			Aluminum							
20*110mm QR Axle (Non-Boost)	20x110 mm Bolt Axle (boost) 15*110 mm Bolt Axle			15*110mm Bolt Axle			15*110mm Bolt Axle							
-	-			FLI			FLI							
mudguard	mudguard			mudguard/long fender			mudguard/long fender							
160, 170, 180mm	80, 100, 130, 140, 150mm			29": 130, 140, 150mm 27.5": 100, 120, 140mm			29": 90, 100, 110, 120, 130, 140mm (Air: 150mm) 27.5": 100, 120, 140mm							
43mm	43mm			47mm			47mm							
27.5": 555 / 565 / 575mm 26": 540 / 550 / 560mm	490 / 510 / 540 / 550 / 560mm			29": 550 / 560 / 570mm 27.5": 510 / 530 / 550mm			29": 510 / 520 / 530 / 540 / 550 / 560 / 570mm 27.5": 510 / 530 / 550mm							
Post-Mount Disc (180 - 220mm max.)	Post-Mount Disc (180 - 220mm max.)			Post-Mount Disc (180 - 220mm max.)			Post-Mount Disc (180 - 220mm max.)							
Taiwan	Taiwan			Taiwan			China							

BIKE CATEGORY	JUNIOR									
Model	F1RST								SNYPER	
	26 AIR	26 AIR TRL	24 AIR	24 AIR TRL	20 AIR	20 AIR TRL	16 AIR	16 AIR TRL	24 AIR	24 TRL
Max Tire (w/o fender)	26"x2.4"		24"x2.6"		20"x2.4"		16"x2.2"		24"x2.2"	
Spring	Air3		Air						Air3	
Damper	BO-TNL								BO-TNL	
	Compress adjust Rebound adjust Lock-Out	Compress adjust Rebound adjust	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out
Lock-Out Remote	-	V	-	V	-	V	-	V	-	V
Steerer	1.5" Aluminum tapered 28.6mm Aluminum						28.6mm Aluminum		1.5" Aluminum tapered 28.6mm Aluminum	
Crown	130mm						130mm		130mm	
Stanchion	32mm Aluminum						30mm Aluminum		32mm Aluminum	
	Hard Anodize Black						Hard Anodize Black		Hard Anodize Black	
Lower	Magnesium						Magnesium		Magnesium	
	15*100mm Bolt Axle 9*100mm Open Dropout						15*100mm Bolt Axle 9*100mm Open Dropout		9*100mm Open Dropout	
Lamp Mount	-						-		-	
Fender Mount	mudguard/long fender						mudguard/long fender		mudguard/long fender	
Travel	100, 120, 130mm		100, 120, 130mm		60, 80, 100, 120mm		50,60mm		60, 70, 80, 100, 120mm	
Fork Offset	38mm						40mm		38mm	
Fork Height	480 / 500 / 510mm		459 / 479/ 489mm		370 / 390 / 410/ 425mm		315/325mm		410 / 420 / 430 / 450 / 470mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 180mm max.)						Post-Mount Disc (140 - 160mm max.) D+V-Brake		Post-Mount Disc (160 - 180mm max.)	
Origin of Production	Taiwan								Taiwan	

SPECIFICATION

JUNIOR									JUNIOR											
AERIAL									VIVO [NEW]											
26 RL	26 TNL-F	26 MLC	24 RL	24 TNL-F	24 MLC	20 RL	20 TNL-F	16 TNL-F	24 AIR-TNL	24 AIR-MLC	24 AIR-HCR	24 TNL	24 MLC	24 T	20 AIR-TNL	20 AIR-MLC	20 AIR-HCR	20 TNL	20 MLC	20 T
26"x2.4"			24"x2.6"			20"x2.4"		16"x2.2"	24"x2.6"						20"x2.4"					
Air Cartridge									Air Cartridge			Coil (Preload Adjust)			Air Cartridge			Coil (Preload Adjust)		
TNL-F		MLC	TNL-F		MLC	TNL-F		TNL-F	Lock-Out	Mechanic-Lock-Out	Compress adjust Rebound adjust	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	Compress adjust Rebound adjust	Lock-Out	Mechanic-Lock-Out	-
Lock-Out Fixed Rebound		Mechanic-Lock-Out	Lock-Out Fixed Rebound		Mechanic-Lock-Out	Lock-Out Fixed Rebound		Lock-Out Fixed Rebound												
V	-	-	V	-	-	V	-	-	-											
1.5" Aluminum tapered 28.6mm Aluminum								28.6mm Aluminum	1.5"" Steel tapered 28.6mm Steel											
130mm								130mm	135mm						125mm					
32mm Steel								30mm Steel	30mm Steel											
QPQ Black									QPQ BLACK			CP Finish			QPQ BLACK			CP Finish		
Magnesium								Magnesium	Aluminum											
15*100mm Bolt Axle 9*100mm Open Dropout									15*110mm Bolt Axle						15*100mm Bolt Axle 9*100mm Open Dropout					
-									-						-					
mudguard/long fender									mudguard/long fender						mudguard/long fender					
100, 120, 130mm						60, 80, 100,120mm		50,60mm	80,100,120,140mm			80,100,120mm			60,80,100,120mm					
38mm								30mm	38mm											
480 / 500 / 510mm			459 / 479 / 489mm			370 / 390 / 410 / 425mm		315/325mm	439 / 459 / 479 / 499mm			439 / 459 / 479mm			370 / 390 / 410 / 430mm					
Post-Mount Disc (160 - 180mm max.)								Post-Mount Disc (140 - 160mm max.)D+V-Brake	Post-Mount Disc (160 - 180mm max.)						Post-Mount Disc (160 - 180mm max.) D+V-Brake					
Taiwan									China											

BIKE CATEGORY	XC															
Model	REVEAL						F1RST						F1RST			
	110-15 Air	110-15 AIR-TRL	29 AIR	29 AIR TRL	27.5 AIR	27.5 AIR TRL	110-15 AIR	110-15 AIR-TRL	110-9 29 / 27.5+ AIR	110-9 29 / 27.5+ AIR-TRL	110-9 27.5 / 26 AIR	110-9 27.5 / 26 AIR-TRL	29 AIR	29 AIR TRL	27.5 AIR	27.5 AIR TRL
Max Tire (w/o fender)	29"x2.6" or 27.5"x2.8"		29"x2.6"		27.5"x2.4"		29"x2.6" or 27.5"x2.8"		29"x2.4" or 27.5"x2.8"		27.5"x2.6" or 26"x3.0"		29"x2.6"		27.5"x2.4"	
Spring	Air3						Air3		Air3				Air3			
Damper	OCR2+		BO-TNL		OCRC+		BO-TNL		OCR				BO-TNL			
	Rebound adjust Lock-Out	Rebound adjust Lock-Out"	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out	Rebound adjust Lock-Out
Lock-Out Remote	-	V	-	V	-	V	-	V	-	V	-	V	-	V	-	V
Steerer	1.5"" Aluminum tapered 28.6mm Aluminum						1.5" Aluminum tapered 28.6mm Aluminum						1.5" Aluminum tapered 28.6mm Aluminum			
Crown	140mm		130mm				140mm		140mm				130mm			
Stanchion	32mm Aluminum						32mm Aluminum						32mm Aluminum			
	Hard Anodize Black						Hard Anodize Black						Hard Anodize Black			
Lower	Magnesium						Magnesium						Magnesium			
	15*110mm Bolt Axle		15*100mm QR Axle 9*100mm Open Dropout				15*110mm Bolt Axle		9*110mm Open Dropout				15*100mm QR Axle 9*100mm Open Dropout			
Lamp Mount	-						-						-			
Fender Mount	mudguard/long fender						mudguard/long fender		mudguard				mudguard/long fender			
Travel	80, 100, 120mm						80, 100, 120mm						80, 100, 120mm			
Fork Offset	51.7mm		51mm		43mm		51mm		51mm		43mm		51mm		43mm	
Fork Height	500 / 520 / 540mm		495 / 515 / 535mm		485 / 505 / 525mm		500 / 520 / 540mm		490 / 510 / 530mm		27.5": 475 / 495 / 515mm 26": 460 / 480 / 500mm		495 / 515 / 535mm		485 / 505 / 525mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)						Post-Mount Disc (160 - 220mm max.)						Post-Mount Disc (160 - 220mm max.)			
Origin of Production	Taiwan						Taiwan									

XC												
AERIAL												
110-15 TNL	110-15 TNL-F	110-15 TNL-R	110-15 RL	110-15 RL-F	110-15 RL-R	110-15 MLC	110-9 29 / 27.5+ RL	110-9 29 / 27.5+ TNL	110-9 29 / 27.5+ MLC	110-9 27.5 / 26 RL	110-9 27.5 / 26 TNL	110-9 27.5 / 26 MLC
29"x2.6" or 27.5"x2.8"							29"x2.4" or 27.5"x2.8"			27.5"x2.6" or 26"x3.0"		
Air Cartridge							Air Cartridge					
TNL	TNL-F	TNL-R	TNL	TNL-F	TNL-R	MLC	TNL		MLC	TNL		MLC
Lock-Out	Lock-Out Fixed Rebound	Rebound adjust Lock-Out	Lock-Out	Lock-Out Fixed Rebound	Rebound adjust Lock-Out	Mechanic-Lock-Out	Lock-Out		Mechanic-Lock-Out	Lock-Out		Mechanic-Lock-Out
-			V			-	V	-	-	V	-	-
1.5" Aluminum tapered 28.6mm Aluminum							1.5" Aluminum tapered 28.6mm Aluminum			1.5" Aluminum tapered 28.6mm Aluminum		
140mm							140mm			140mm		
32mm Steel							32mm Steel			32mm Steel		
QPQ Black							QPQ Black			QPQ Black		
Magnesium							Magnesium			Magnesium		
15*110mm Bolt Axle							9*110mm Open Dropout			9*110mm Open Dropout		
-							-			-		
mudguard/long fender							mudguard			mudguard		
80, 100, 120mm							80, 100, 120mm			80, 100, 120mm		
51mm							51mm			43mm		
500 / 520 / 540mm							490 / 510 / 530mm			27.5": 475 / 495 / 515mm 26": 460 / 480 / 500mm		
Post-Mount Disc (160 - 220mm max.)							Post-Mount Disc (160 - 220mm max.)			Post-Mount Disc (160 - 220mm max.)		
Taiwan							Taiwan			Taiwan		

BIKE CATEGORY	XC													
Model	AERIAL													
	29 RL-R	29 TNL-R	29 RL-F	29 TNL-F	29 RL	29 TNL	29 MLC	27.5 RL-R	27.5 TNL-R	27.5 RL-F	27.5 TNL-F	27.5 RL	27.5 TNL	27.5 MLC
Max Tire (w/o fender)	29"x2.6"							27.5"x2.4"						
Spring	Air Cartridge							Air Cartridge						
Damper	TNL-R		TNL-F		TNL		MLC	TNL-R		TNL-F		TNL		MLC
	Rebound adjust Lock-Out		Lock-Out Fixed Rebound		Lock-Out		Mechanic-Lock-Out	Rebound adjust Lock-Out		Lock-Out Fixed Rebound		Lock-Out		Mechanic-Lock-Out
Lock-Out Remote	V	-	V	-	V	-	-	V	-	V	-	V	-	-
Steerer	1.5" Aluminum tapered 28.6mm Aluminum							1.5" Aluminum tapered 28.6mm Aluminum						
Crown	130mm							130mm						
Stanchion	32mm Steel							32mm Steel						
	QPQ Black							QPQ Black						
Lower	Magnesium							Magnesium						
	15*100mm Bolt Axle 9*100mm Open Dropout							15*100mm Bolt Axle 9*100mm Open Dropout						
Lamp Mount	-							-						
Fender Mount	mudguard/long fender							mudguard/long fender						
Travel	80, 100, 120mm							80, 100, 120mm						
Fork Offset	51mm							43mm						
Fork Height	495 / 515 / 535mm							485 / 505 / 525mm						
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)							Post-Mount Disc (160 - 220mm max.)						
Origin of Production	Taiwan							Taiwan						

XC											
OMEGA											
29 RL	29 TNL	29 MLC	29 T	27.5 RL	27.5 TNL	27.5 MLC	27.5 T	26 RL	26 TNL	26 MLC	26 T
29"x2.6"				27.5"x2.4"				26"x2.4"			
Coil (Preload Adjust)				Coil (Preload Adjust)				Coil (Preload Adjust)			
TNL		MLC	-	TNL		MLC	-	TNL		MLC	-
Lock-Out		Mechanic-Lock-Out	-	Lock-Out		Mechanic-Lock-Out	-	Lock-Out		Mechanic-Lock-Out	-
V	-	-	-	V	-	-	-	V	-	-	-
1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel			
130mm				130mm				130mm			
32mm Steel				32mm Steel				32mm Steel			
CP Finish				CP Finish				CP Finish			
Magnesium				Magnesium				Magnesium			
15*100mm Bolt Axle 9*100mm Open Dropout				15*100mm Bolt Axle 9*100mm Open Dropout				9*100mm Open Dropout			
-				-				-			
mudguard/long fender				mudguard/long fender				mudguard/long fender			
80, 100, 120mm				80, 100, 120mm				80, 100, 120mm			
51mm				43mm				38mm			
495 / 515 / 535mm				485 / 505 / 525mm				460 / 480 / 500mm			
Post-Mount Disc (160 - 220mm max.)				Post-Mount Disc (160 - 220mm max.)				Post-Mount Disc (160 - 220mm max.)			
China				China				China			

BIKE CATEGORY	XC							
Model	BLAZE							
	29 RL	29 TNL	29 MLC	29 T	27.5 RL	27.5 TNL	27.5 MLC	27.5 T
Max Tire (w/o fender)	29"x2.6"				27.5"x2.6"			
Spring	Coil (Preload Adjust)							
Damper	TNL		MLC	-	TNL		MLC	-
	Lock-Out		Mechanic-Lock-Out	-	Lock-Out		Mechanic-Lock-Out	-
Lock-Out Remote	V	-	-	-	V	-	-	-
Steerer	1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel			
Crown	130mm							
Stanchion	32mm Steel				30mm Steel			
	CP Finish							
Lower	Aluminum							
	15*100mm Bolt Axle 9*100mm Open Dropout							
Lamp Mount	FLI							
Fender Mount	mudguard/long fender				mudguard			
Travel	70, 80, 100, 120mm				80, 100, 120mm			
Fork Offset	51mm				44mm			
Fork Height	490 / 500 / 520 / 540mm				475 / 495 / 515mm			
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.)							
Origin of Production	China				China			

DIRT JUMP							TREKKING				
SPACE		SLOPE	SHINE	DIRT			VOYAGE [NEW]		AVION		
Jump	Free	HC	RA	RA	R	T	BO-TNL	TNL-F	110-15 AIR	110-15 AIR-TRL	110-15 AIR w/o Lockout
26"x2.4"		27.5"x2.4" or 26"x2.4"	26"x2.4"	26"x2.2"			700*60C or 29"x 2.6"		29"x2.8"		
Air3	Coil	Air3	Air Cartridge	Coil (Preload Adjust)		Dual Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)	Air3		
RA		OCRC+	RA	RA	R	-	BO-TNL	TNL-F	BO-TNL		HCR
Rebound adjust		Compress adjust Rebound adjust	Rebound adjust	Rebound adjust	Fixed Rebound	-	Compress adjust Rebound adjust Lock-Out	Fixed Rebound	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust
-	-	-	-	-	-	-	-	-	-	V	-
1.5" Aluminum tapered 28.6mm Aluminum	28.6mm Cr-mo steel	1.5" Aluminum tapered 28.6mm Aluminum	1.5" Steel tapered	28.6mm Cr-Mo Steel			1.5" Aluminum tapered		1.5" Aluminum tapered		
138mm		130mm	130mm	130mm			140mm		140mm		
36mm Aluminum	36mm Steel	34mm Aluminum	34mm Steel	32mm Steel			36mm Aluminum	36mm steel	35mm Aluminum		
Hard Anodize Black	QPQ Black	Hard Anodize Black	QPQ black	CP Finish			Hard Anodize Black	QPQ black	Hard Anodize Black		
Magnesium		Magnesium	Magnesium	Aluminum			Magnesium		Aluminum		
15*110mm Bolt Axle 20*110mm Bolt Axle (Non-Boost)		15*100mm QR Axle	15*100mm Bolt Axle	15*100mm Bolt Axle			15*110mm Bolt Axle		15*110mm Bolt Axle		
-	-	-	-	-			FLI		FLI		
mudguard		mudguard	mudguard	mudguard			mudguard/long fender		mudguard/long fender		
80, 100mm		80, 100, 130mm	80, 100, 130mm	RA / T : 80, 100, 130mm R: 80, 100 mm			80, 100, 120mm		100, 120mm		
43mm		43mm	43mm	38mm			47mm		46mm		
465 / 485mm		27.5": 475 / 495 / 525mm 26": 470 / 490 / 520mm	470 / 490 / 520mm	460 / 480 / 510mm			507 / 527 / 547mm		520/540mm		
Post-Mount Disc (180 - 220mm max.)		Post-Mount Disc (180 - 220mm max.)	Post-Mount Disc (180 - 220mm max.)	Post-Mount Disc (160 - 220mm max.)			Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready Max. Loading 170KGS		Post-Mount Disc (180 - 220mm max.) Max. Loading 160KGS		
Taiwan		Taiwan	Taiwan	China					Taiwan		

BIKE CATEGORY	TREKKING									
Model	PULSE				VOLTA		VOGUE E [NEW]		VOLAIR E	
	29 Air-RL	29 Air-TNL	27.5 Air RL	27.5 Air TNL	AIR TRL	AIR	AIR TRL	AIR	RL	TNL-F
Max Tire (w/o fender)	29"x2.8"		27.5"x2.6"		700x55C		700x55C		700x55C	
Spring	Air Cartridge		Air Cartridge		Air Cartridge		Air Cartridge		Air Cartridge	
Damper	TNL				BO-TNL		TNL-R		TNL-F	
	Lock-Out		Lock-Out		Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Remote Lock-Out Fixed Rebound	Lock-Out Fixed Rebound
Lock-Out Remote	V	-	V	-	V	-	V	-	V	-
Steerer	1.5" Aluminum tapered 28.6mm Aluminum				1.5" Aluminum tapered 28.6mm Aluminum"		1.5" Aluminum tapered 28.6mm Aluminum"		1.5" Aluminum tapered 28.6mm Aluminum	
Crown	130mm				130mm		130mm		130mm	
Stanchion	32mm Steel		30mm Steel		32mm Aluminum		30mm Aluminum		32mm Steel	
	QPQ black				Hard Anodize Black		Hard Anodize Black		QPQ Black	
Lower	Aluminum				Aluminum		Aluminum		Aluminum	
	15*100mm Bolt Axle 9*100mm Open Dropout				15*100mm Bolt Axle 9*100mm Open Dropout		15*100mm Bolt Axle 9*100mm Open Dropout		15*100mm Bolt Axle 9*100mm Open Dropout	
Lamp Mount	FLI				FLI		FLI		FLI	
Fender Mount	mudguard/long fender		mudguard		mudguard/long fender		mudguard/long fender		mudguard/long fender	
Travel	50, 60, 80, 100, 120mm		60, 80, 100mm		50, 60, 80mm		50, 60, 80,100mm		50, 60, 80mm	
Fork Offset	51mm		43mm		44mm		44mm		44mm	
Fork Height	470 / 480 / 500 / 520 / 540mm		455 / 475 / 495mm		460 / 470 / 490mm		460 / 470 / 490 / 510mm		460 / 470 / 490mm	
Brake Type / Rotor Size	Post-Mount Disc (160 - 220mm max.) Max. Loading 150KGS				Post-Mount Disc (160 - 220mm max.) Max. Loading 140KGS		Post-Mount Disc (160 - 220mm max.) Max. Loading 140KGS		Post-Mount Disc (160 - 220mm max.) Max. Loading 150KGS	
Origin of Production	Taiwan				Taiwan		Taiwan		Taiwan	

TREKKING															
VIVAIR E [NEW]				VOLAR				VOLANT [NEW]				AVALON			
RL-F	TNL-F	RL	TNL	RL	TNL	MLC	T	RL	TNL	MLC	T	27.5 RL	27.5 TNL	27.5 MLC	27.5 T
700x55C				700x55C				700x55C				27.5"x2.2" & 26"x2.4"			
Air Cartridge				Coil (Preload Adjust)				Coil (Preload Adjust)				Coil (Preload Adjust)			
TNL-F		TNL		TNL		MLC	-	TNL		MLC	-	TNL		MLC	-
Fixed Rebound Remote Lock Out	Fixed Rebound Lock-Out	Remote Lock-Out	Lock-Out	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Lock-Out	Mechanic-Lock-Out	-
V	-	V	-	V	-	-	-	V	-	-	-	V	-	-	-
1.5" Aluminum tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel				1.5" Steel tapered 28.6mm Steel			
130mm				130mm				130mm				130mm			
30mm Steel				32mm Steel				30mm Steel				30mm Steel			
QPQ Black				CP Finish				CP Finish				CP Finish			
Aluminum				Aluminum				Aluminum				Aluminum			
15*100mm Bolt Axle 9*100mm Open Dropout				15*100mm Bolt Axle 9*100mm Open Dropout				15*100mm Bolt Axle 9*100mm Open Dropout				15*100mm Bolt Axle 9*100mm Open Dropout			
FLI				FLI				FLI				PLS			
mudguard/long fender				mudguard/long fender				mudguard/long fender				mudguard/long fender			
50, 60, 80,100mm				50, 60, 80mm				50, 60, 80,100mm				50, 60, 80mm			
44mm				44mm				44mm				38mm			
460 / 470 / 490/510mm				460 / 470 / 490mm				460 / 470 / 490 /510mm				440 / 450 / 470mm			
Post-Mount Disc (160 - 220mm max.) Max. Loading 160KGS				Post-Mount Disc (160 - 220mm max.) Max. Loading 150KGS				Post-Mount Disc (160 - 220mm max.) Max. Loading 160KGS				Post-Mount Disc (160 - 220mm max.) Max. Loading 140KGS			
Taiwan				China				China				China			

BIKE CATEGORY	CARGO					Fat Bike								
Model	BEAST				PORTER	RENEGADE			GUIDE DC					
	24 R	24 T	20 R	20 T	20 T	26 AIR-TRL	26 AIR	26 TNL	26 AIR-TNL	26 TNL	20 AIR-TNL	20 TNL	20 T	20 TNL
Max Tire (w/o fender)	24"x2.6"		20"x2.6"		20"x2.4"	26"x4.0"			26"x4.6"		20"x4.6"			20"x4.6"
Spring	Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Dual Coil (Preload Adjust)	Air3		Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)	Air Cartridge	Coil (Preload Adjust)		Coil (Preload Adjust)
Damper	R	-	R	-	-	BO-TNL		TNL	TNL	TNL	TNL	TNL	-	TNL
	Fixed Rebound	-	Fixed Rebound	-	-	Rebound adjust Lock-Out	Compress adjust Rebound adjust Lock-Out	Lock-Out	Lock-Out	Lock-Out	Lock-Out	Lock-Out	-	Lock-Out
Lock-Out Remote	-	-	-	-	-	V	-	-	-	-	-	-	-	-
Steerer	1.5" Cr-Mo Steel tapered		1.5" Cr-Mo Steel tapered		28.6mm Cr-Mo Steel	1.5" Aluminum tapered 28.6mm Aluminum		1.5" Steel tapered	28.6mm Steel					28.6mm Steel
Crown	135mm		145mm		125mm	190mm			180mm					190mm
Stanchion	36mm Steel				30mm Steel	32mm Aluminum		32mm Steel	32mm Steel					36mm Steel
	CP Finsh				CP Finish	Hard Anodize Black		CP Finish	CP Finish					QPQ Black
Lower	Aluminum				Magnesium	Magnesium			Aluminum					
	15*100mm Bolt Axle		15*110mm Bolt Axle		15*100mm Bolt Axle	15*150mm QR Axle			15*135mm Bolt Axle 9*135mm Open Dropout					
Lamp Mount	FLI				-	-			-		-			-
Fender Mount	mudguard/long fender				mudguard/long fender	mudguard/long fender			mudguard		mudguard/long fender			mudguard
Travel	50, 60, 70mm		50, 60, 70mm		40 ,60, 80mm	80, 100, 120mm			80, 100, 120mm		50, 60, 80mm			60, 80mm
Fork Offset	43mm		43mm		38mm	51mm			56mm					86mm
Fork Height	414 / 424 / 434mm		370 / 380 / 390mm		363 / 383 / 403mm	500 / 520 / 540mm			520 / 540 / 560mm		410 / 420 / 440mm			440 / 460mm
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (180 - 220mm max.) * Bosch e-Bike ABS Ready		Post-Mount Disc (160 - 220mm max.)	Post-Mount Disc (160 - 220mm max.)			Post-Mount Disc (160 - 220mm max.)					
Origin of Production	China		China		China	Taiwan			China		China			

Fat Bike										
GAIA	GUIDE									
20 T	26 AIR-TNL	26 AIR-MLC	26 TNL	26 MLC	26 T	20 AIR-TNL	20 AIR-MLC	20 TNL	20 MLC	20 T
20"x4.6"	26"x4.6"					20"x4.6"				
Coil (Preload Adjust)	Air Cartridge		Coil (Preload Adjust)			Air Cartridge		Coil (Preload Adjust)		
T	TNL	MLC	TNL	MLC	-	TNL	MLC	TNL	MLC	-
Rebound Adjust	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Lock-Out	Mechanic-Lock-Out	Lock-Out	Mechanic-Lock-Out	-
-	-	-	-	-	-	-	-	-	-	-
28.6mm Steel	1.5" Steel tapered 28.6mm Steel									
165mm	180mm									
30mm / 32mm Steel	32mm Steel									
CP Finish	CP Finish									
Aluminum	Aluminum									
10.5*135mm Open Dropout	15*135mm Bolt Axle 9*135mm Open Dropout									
-	-					-				
mudguard	mudguard					mudguard/long fender				
80mm	75, 95, 120mm					45, 60mm				
61mm	50mm									
394.8mm	515 / 535 / 560mm					410 / 425mm				
Post-Mount Disc (180mm)	Post-Mount Disc (160 - 220mm max.)									
China	China					China				

BIKE CATEGORY	Fat Bike				E-Moto		
Model	GUIDE				SIGMA		
	26 AIR-TNL	26 TNL	26 MLC	26 T	27.5 AIR	27.5 COIL	20 AIR
Max Tire (w/o fender)	26"x4.6"				27.5"x2.4"		20"x4.0"
Spring	Air Cartridge	Coil (Preload Adjust)			Air Cartridge	Coil	Air Cartridge
Damper	TNL	TNL	MLC	-	OCR+		HCR
	Lock-Out	Lock-Out	Mechanic-Lock-Out	-	Compress adjust Rebound adjust		Compress adjust Rebound adjust
Lock-Out Remote	-	-	-	-	-		-
Steerer	1.5" Steel tapered				28.6mm Aluminum		28.6mm Aluminum
Crown	180mm				151mm-Dual		171mm-Dual
Stanchion	34mm Steel				38mm Aluminum		36mm Aluminum
	QPQ Black				Hard Anodize Black		Hard Anodize Black
Lower	Aluminum				Aluminum		Aluminum
	9*135mm Open Dropout 15*135mm Bolt Axle				20*110mm Bolt Axle (Non-Boost)		15*135mm Bolt Axle
Lamp Mount	-				-		-
Fender Mount	mudguard				mudguard		mudguard
Travel	75, 95, 120mm				200mm		150mm
Fork Offset	50mm				45mm		40mm
Fork Height	515 / 535 / 560mm				591mm		482mm
Brake Type / Rotor Size	Post-Mount Disc (180 - 220mm max.)				Post-Mount Disc 220mm max.		Post-Mount Disc (180 - 220mm max.)
Origin of Production	China				China		China

Bike Category	SINGLE SHOCK	
Model	SS 3.0	SS-A8
Max Tire (w/o fender)	700 x 50C	700 x 50C
Feature	Alu.Blade Changeable spring	Alu.Blade Changeable spring
Spring	coil with MCU	coil with MCU
Steerer	1.5"Aluminum tapered steerer module (210mm length min)	28.6mm Aluminum (Optional 1.5" Aluminum tapered steerer) (210mm length min)
Lower	Customized	Aluminum
		9mm open dropout
Lamp Mount	-	-
Fender Mount	Customized	mudguard/long fender
Travel	35mm	35mm
Fork Offset	Customized	43mm
Fork Height	Customized	475mm
Brake Type / Rotor Size	Customized	Disc only or Disc+V-Brake (optional Roller Mount) (160-180mm max.)
Origin of Production	Taiwan	Taiwan

EU

AUSTRIA
Paul-Lange Austria GmbH
www.paul-lange.at
+43-7242-4970
mail@paul-lange.at

CZECH
Universe Agency Spol. S.R.O
cz.author.eu
+420-244-990-777
info@author.cz

GREECE
Nikos Maniatopoulos S.A.
idealbikes.net
+30-2610-993045
+30-2610-990424
info@idealbikes.net

SLOVAK REP.
Universe Slovakia S.R.O.
+421-326-521-902
author@author.sk

BENELUX
Buzaglo B.V.
buzaglo.nl
+31-36-521-0100
info@buzaglo.nl

FRANCE
RST-Paul Lange France SARL
paul-lange.fr
+33 388 93 - 2101
info@paul-lange.fr

ITALY
GB CENTER
+39 0423 040109
assistenza@gb-center.it

SWITZERLAND
Fuchs-movesa AG
fuchs-movesa.ch
+41-56-464-46-46
info@fuchs-movesa.ch

BULGARIA
Nikol Bike Center Ltd.
bikecenter.bg
+359-89-5460025
philip.haralambov@bikecenter.bg

GERMANY
Paul Lange GmbH & Co.KG
paul-lange.de
+49-711-258802
info@paul-lange.de

POLAND
Velo Sp. Z. O. O.
velo.pl
+48-32-330-67-00
informacje@velo.com.pl

United Kingdom
Brandon Cyclesports
gobrandon.com
+44 (0) 1450 373333
+44 (0) 1450 375 252
info@gobrandon.com

non EU

ARGENTINA
Nexina S.A
nexina.com.ar
+54 9 1131375170
jcuenca@nexina.com.ar

CHILE
ANDES INDUSTRIAL LTDA.
andesindustrial.cl
+56-2-2650-3100
+56-2-719-1136
andes@andesindustrial.cl

U.S.A.
Trail Labs LLC, Inc
traillabs.com
+417-324-7901
info@traillabs.com

RUSSIA
Arves Market Ltd.
arvesmarket.ru
+7-499-153-0721
+7-495-991-6888
arvesmarket@yandex.ru

BRAZIL
GRUPO JOGÁ
www.grupojoga.com.br
(16) 3384-8200
(16) 99633-9375
comercial@grupojoga.com.br

CHINA
Suzhou Dawei Precision Co., Ltd.
rstsuspension.com
+86-512-8616-0698
+86-512-8616-0100
sales2@rst-topway.cn

PHILIPPINES
Comet Cycle Center
cometcycle.com
+63-2-8372-5590
+63-2-372-5590
comet@cometcycle.com

TAIWAN
RST Greenergy Technology Co. Ltd.
rstsuspension.com
+886-2-8521-2351
+886-2-8521-6159
rst@rst.com.tw

CENTER AMERICA
Distribuidora Ochenta Y Seis S.A.
d86group.com
+506-4035-2000
info@d86group.com

COLOMBIA
Len Importaciones Ltda.
lenimp.com
+57-76712222
paula.rueda@lenimp.com

RUSSIA
Maximum Ltd.
st-peterbike.ru
+7-812-740-79-62
maximum@msgbox.ru

PERU
Ciclo Planet
cicloplanetperu.com
+51 961-415-986
ventascicloplanet@hotmail.com

HEAD QUARTER

RST TAIWAN

RST GREENERGY TECH. CO., LTD.
TEL : +886.2.85212351
Email : rst@rst.com.tw

RST EUROPE

RST EUROPE OFFICE
TEL : +49.711.2588255
Email : info@rst-europe.eu

RST SUSPENSION AUSTRIA
TEL ： +43-7242-4970
Email ： Christian.Bartik@rst-europe.eu

RST CHINA

SUZHOUN DAWEI PRECISION CO., LTD.
TEL : +86.512.86160698
Email : sales2@rst-topway.cn

www.rstsuspension.com